




oilite[®]
BEARINGS

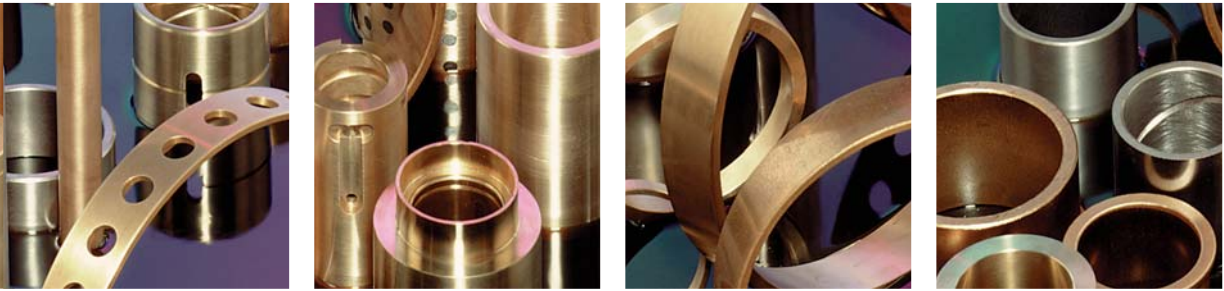


Oilite[®]

Super Oilite[®]

Non-Tox[®]

Excelite[®]

Bearings

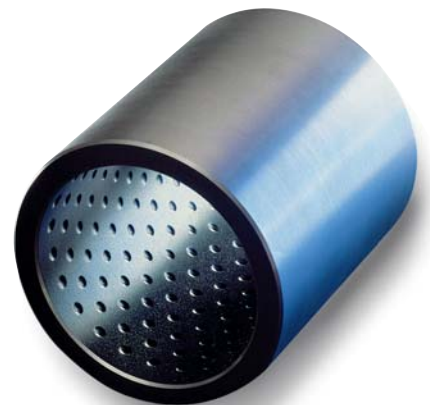

oilite[®]

BEARINGS

INTRODUCTION

A commitment to provide products and support that routinely goes beyond the expected. From engineering assistance to production and shipment, you will experience:

BEARING RESOURCES + BEARING SOLUTIONS BEARING EXCELLENCE

PERIOD.

TABLE OF CONTENTS

BEARING DESIGN INFORMATION

.....1

OILITE BEARINGS

Oilite *Plus*[®] Sleeve Bearings.....8

Oilite *Plus*[®] Flange Bearings16

Oilite *Plus*[®] Thrust Bearings19

Raw Materials21

M Series[®] Metric Bearings.....22

SUPER OILITE BEARINGS

Super *Oilite*[®] Bearings25

Raw Materials26

NON-TOX BEARINGS

Oilite Non-Tox[®] Sleeve28

Oilite Non-Tox[®] Flange28

Oilite Non-Tox[®] Thrust28

Oilite Non-Tox[®] M Series[®]29

Super *Oilite*[®] Non-Tox[®] Sleeve30

Super *Oilite*[®] Non-Tox[®] Flange30

Super *Oilite*[®] Non-Tox[®] Thrust.....30

EXCELITE BEARINGS

Bearing Design Information.....32

Sleeve Bearings35

ADDITIONAL MANUFACTURING CAPABILITIES

General Information37

The information in this catalog should be used as a guide for your consideration, investigation and verification. This information does not constitute a warranty or representation, and we assume no legal responsibility or obligation with respect thereto and the use to which such information may be put.

OILITE and EXCELITE are Registered Trademarks of Beemer Precision, Inc in the USA, Canada, United Kingdom and European Union



GENERAL CHARACTERISTICS and TYPICAL BEARING USES

Oilite bearing products are made by the P/M process, with close controls on materials and manufacturing to produce the premier self-lubricating bearing. With the emphasis on quality throughout the process, we produce Oilite bearings with large interconnected pores vital for the channeling of lubricants to areas between the shaft and bearing. At rest, the capillary action will recover lubricant from the surface and replenish the reservoirs. This porosity feature of Oilite is the most sought-after quality of our bearings.

THE P/M PROCESS

Fine powders are combined and blended into a mix and are compacted in a die under high pressure. The compacted parts are sintered at high temperature in a protective atmosphere belt furnace. Sintered parts are then sized to obtain the exact dimensions and close tolerances desired. The final step in the P/M process is vacuum impregnation of the bearings, or filling the pores with lubricant.



TYPICAL PROPERTIES* OILITE BEARING MATERIALS

PROPERTIES	OILITE BRONZE†	SUPER OILITE	SUPER OILITE 16
Composition — Percent			
COPPER	87.2 - 90.5	18.0 - 22.0	18.0 - 22.0
IRON	1.0 MAX	BALANCE	BALANCE
LEAD	—	—	—
GRAPHITE	0 - 0.3	—	0.6 - 1.0
TIN	9.5 - 10.5	—	—
ACID INSOLUBLES (MAX.)	—	—	—
MAGNESIUM	—	—	—
TOTAL OTHER ELEMENTS (MAX.)	1.0	2.0	2.0
BALANCE	—	—	—

Physical & Mechanical Properties

DENSITY (GM PER CU. CM.)	6.4 - 6.8	5.8 - 6.2	6.0 - 6.4
POROSITY (% OIL BY VOLUME)	19 MIN.	19 MIN.	15 MIN.
"K" STRENGTH CONSTANT	26,500	40,000	60,000
ELONGATION (% IN ONE INCH)	1	1	0.5
YIELD STRENGTH IN COMP. (PSI)**	11,000	22,000	40,000

Comparable Specifications

ASTM	B-438-05 GR 1 TYPE II	B-439-07 GR 4	B-426 GR 4 TYPE II
MILITARY	MIL-B-5687D TYPE 1 GR. 1	MIL-B-5687D TYPE 2 GR. 4	—
MPIF	CT-1000-K26	FC-2000-K30	N/A
SAE — NEW	841	863	—
OLD	TYPE 1 CLASS A	TYPE 3	—


*Bearings may exhibit appreciable differences in properties due to size, shape, thickness, etc.
**For .001" permanent set on test specimens 1-1/4" diameter by 1" long.



ADVANTAGES and APPLICATIONS

OILITE

Self-lubricating, highly wear-resistant, ductile, conformable and corrosion resistant. Large pore structure complete with complete alpha phase bronze and twinning. Most widely used of all Oilite bearing materials.

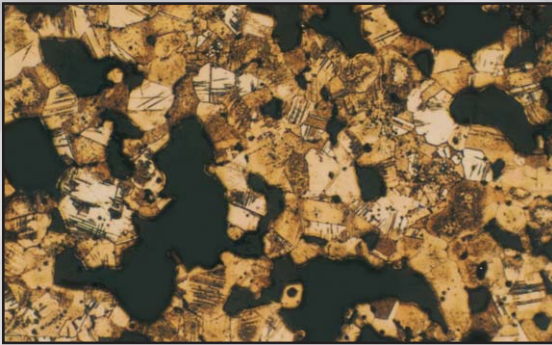

Used in appliances, business machines, cylinders, exercise apparatus, lawn and garden equipment, medical applications, material handling, packaging and printing machines, and tools.

OILITE PLUS

The advantage of Oilite *Plus* is realized in applications in which mixed-film, and boundary lubrication is exhibited. These kinds of conditions occur in well over 75% of all self-lubricating bearings applications.

Shaft oscillation or slow speed, intermittent use, pulsating or uneven loads are conditions that inhibit full-film lubrication from developing or being maintained. These applications would benefit significantly from using Oilite *Plus*.

Oilite *Plus* features a complex bearing system that greatly reduces friction. The impregnation of the bearing includes a finely dispersed PTFE in an oxidation and corrosion inhibiting turbine oil. On average a 17% reduction of friction will result in smoother and quieter operation, easier “break-in”, lower power requirements and longer life.

Applications include all equipment in the Oilite section with emphasis on agricultural and construction equipment, material handling machines, man-lifts and computer peripherals.

SUPER OILITE

Self-lubricating, harder, higher strength and generally more economical than Oilite bronze, but a lower speed rated bearing material for general application. Recommended for high load applications at low speeds.

Used in farm equipment, off-road equipment, winches, sheaves, conveyors, pulleys, etc.

SUPER OILITE 16

Self-lubricating. Similar metallurgically to Super Oilite, but heat treated to a particle hardness greater than Rc50. High compressive strength for extreme load, low speed reciprocating and oscillating applications. Requires hardened steel shaft.

Used in earth-moving equipment, cranes and hoists, railway brake rigging, presses, conveyors, etc.

LOADS AND SPEEDS

The best method for evaluating the acceptability of Oilite bearings for any given application is by using PV factor (Pressure x Surface Velocity) where:

P = the load in (psi) on the projected bearing area (Bearing ID x Length).

V = surface velocity of the shaft in feet per minute (SFM).

$$PV = \frac{W}{LD} \times \frac{\pi DN}{12} = \frac{3.14 WN}{12L}$$

W = total load on bearing (pounds)

L = bearing length (inches)

D = ID of bearing (inches)

N = shaft speed (rpm)


MATERIAL	NORMAL UPPER LIMITS FOR OILITE BEARING MATERIALS			
	PV	P(PSI) STATIC	P(PSI) DYNAMIC	V (sfm)
OILITE BRONZE	50,000	8,000	2,000	1,200
SUPER OILITE	35,000	20,000	4,000	225
SO-16	75,000	50,000	8,000	35

This information, based on our experience, is in line with accepted engineering practice and is believed to be reliable. Oilite bearings should not be used in applications that exceed operating conditions outlined, either in this catalog or in other information provided. Beemer Precision Inc. assumes no obligation or liability in connection with its use or the users end product.

INSTALLATION, SIZING and SHAFTING

INSTALLATION

Bearings are usually installed by means of a shouldered arbor plug inserted in an arbor press. A chamfer in the housing bore is necessary to serve as a lead for the bearing. An unchamfered edge might shear metal from the bearing OD, seriously reducing the press fit. The OD chamfer on the lead end of the bearing acts as a pilot, and the ID chamfer in the bearing serves as a lead when the shaft is inserted. Any out-of-roundness condition is corrected when the bearing is pressed into the housing. See our interactive website at www.oilite.com to calculate close-ins and press fits.

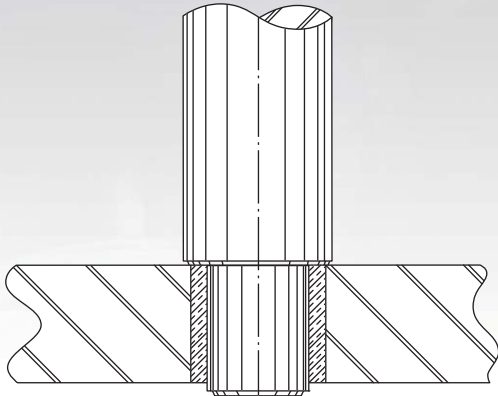

A Shouldered Arbor

SIZING

The sizing of the ID is controlled by the method selected. Several methods are commonly used:

1. No Tool Contacting ID

The bearing is pressed into the housing without the use of tools. This method allows the ID to close-in without restraint. The approximate amount of close-in is determined by the bearing material wall thickness and housing conditions.

2. Combination Insertion and Sizing Plug

The amount of close-in may be controlled by use of a combination insertion and sizing tool. The plug diameter should be approximately .0003" greater than the desired final bearing ID. The plug should fit freely in the bearing ID before installation. When the bearing is pressed into the housing, its ID will close-in on the plug. The interference between the ID and the tools is less than the interference between the OD and the housing. Upon tool withdrawal, the ID will spring back between .0002" and .0005", depending on material, bearing size and mounting conditions. The exact amount of the springback range should be determined by actual tests.

3. Roller-Type Burnisher

Roller-type burnishing tools can be used for high-production work, especially where ID tolerances are to be held within .0005".

SHAFTING

Optimum bearing operation requires a shaft of proper material, hardness and surface finish. Generally, carbon steel shafts are preferred over stainless steels. Stainless steel shafts can be problematic under certain conditions and applications. Contact our engineering department for assistance.

Shaft hardness must always be harder than the bearing (particle hardness) selected. Hardened shafts add to the load carrying ability of the bearing. Along with hardness, surface finish will improve the bearing's performance. Each application is unique and, therefore, load considerations and subsequent testing is recommended.

MACHINING

Machining Oilite presents no problems. There are a few basic procedures that should be followed to preserve the open-pore structure of the Oilite material so it will retain its full self-lubricating qualities. Cutting tools must be sharp. For this reason tungsten carbide tooling is highly recommended since they hold a cutting edge much longer. This preserves the open-pore structure from which oil can flow freely. A dull tool will smear the pores, greatly reducing these self-lubricating qualities in the material.

Oilite bearings may be reamed provided a dead-sharp cutting tool is used. However, reaming does destroy porosity more than single point tooling. Honing and grinding are never recommended on Oilite bearings on any surface which will become the bearing surface. These operations will smear the pores and will not allow the oil to flow freely.

LUBRICATION

Lubrication is a very important consideration, since certain conditions will necessitate the need for different oils and lubricants. These choices can greatly affect the performance and efficiency of the bearing.

Oilite is a metallic sponge with the lubricant stored in the interconnected pores of the bearing. Capillary action holds the lubricant in the bearing and prevents it from dripping. Pressure and/or heat applied to the bearing brings the lubricant to the surface where it forms a protective oil film or optimally a hydrodynamic wedge between the bearing and the shaft.

LUBRICANTS

Oilite bearings are vacuum impregnated with oil. There are many grades of oils and lubricants specifically developed to meet special or extreme conditions or requirements such as, high and low temperature, high loads, high speeds, low loads, low speeds, plastic compatibility or FDA compliance. Many applications combine several of these conditions.

Viscosity is the most important property of a lubricant. Viscosity is the internal friction of a fluid, or its resistance to flow. Speed and subsequent temperature build-up can cause the viscosity to become too thin to support the shaft loads, resulting in bearing failure.

OIL CHARACTERISTICS	OILITE® AM1-SPD®	OILITE® PLUS (diluent only)	OILITE® & SUPER OILITE® FOOD CONTACT®	OILITE® & SUPER OILITE® NON-TOX®
Viscosity (SUS) @ 100° F	112 cSt	60.4 cSt	350 SUS	60 cSt
@ 210° F	16.4 cSt	11 cSt	—	9.5 cSt
Viscosity Index	160	176	—	140
Flash Point	470° F	475° F	454° F	465° F
Pour Point	-55° F	-75° F	0° F	-90° F

OIL CHARACTERISTICS	SUPER OILITE® AM3-SPD®	SUPER OILITE® PLUS (diluent only)	SUPER OILITE 16® AM3-SPD®
Viscosity (SUS) @ 100° F	480 cSt	60.4 cSt	480 cSt
@ 210° F	41 cSt	11 cSt	41 cSt
Viscosity Index	133	176	133
Flash Point	482° F	475° F	482° F
Pour Point	-22° F	-75° F	-22° F

NOTE: SPD® Synthetic Performance Difference lubricants.
Oilite Plus may not be compatible with some plastics.



TOLERANCES ALL FIGURES ARE IN INCHES

PLAIN AND FLANGE BEARINGS

Inside and Outside Diameters

OVER	UP TO & INCL.	OILITE/OILITE PLUS	SUPER OILITE
-	1/2	+0.000	-.001
1/2	1	+0.000	-.001
1	1-1/2	+0.000	-.0015
1-1/2	2-1/2	+0.000	-.0015
2-1/2	3-1/2	+0.000	-.002
3-1/2	4-1/2	+0.000	-.0025
4-1/2	5-1/2	+0.000	-.0035
5-1/2	6-1/2	+0.000	-.004

Length

OVER	UP TO & INCL.	OILITE/OILITE PLUS	SUPER OILITE
-	1-1/2	±.005	±.010
1-1/2	3	±.0075	±.015
3	4-1/2	±.010	±.020
4-1/2	6	±.015	±.030

Flange Diameters — Based on Flange OD

OVER	UP TO & INCL.	OILITE/OILITE PLUS	SUPER OILITE
-	1-1/4	±.005	±.010
1-1/4	2-1/2	±.010	±.015
2-1/2	4	±.015	±.020
4	6	±.025	±.025

Flange Thickness — Based on Flange OD

OVER	UP TO & INCL.	OILITE/OILITE PLUS	SUPER OILITE
-	1-1/4	±.0025	±.005
1-1/4	2-1/2	±.005	±.0075

Flange Fillets, Radii — Based on Body OD

OVER	UP TO & INCL.	OILITE/OILITE PLUS	SUPER OILITE
-	1	1/32 ±.010	1/32 ±.010
1	2	3/64 ±.010	3/64 ±.010
2	2-1/2	1/16 ±.010	1/16 ±.010
2-1/2	4	3/32 ± 1/64	3/32 ± 1/64
4	6	1/8 ± 1/64	1/8 ± 1/64

Concentricity, ID with respect to OD (Maximum Total Dial Indicator Reading) — Based on ID

OVER	UP TO & INCL.	OILITE/OILITE PLUS	SUPER OILITE
-	1	.003	.003
1	1-1/2	.003	.004
1-1/2	3	.004	.005
3	4-1/2	.005	.006
4-1/2	6	.006	.007

THRUST BEARINGS

Inside Diameter

OVER	UP TO & INCL.	OILITE/OILITE PLUS	SUPER OILITE
-	1-1/4	±.005	±.005
1-1/4	2-1/2	±.010	±.010
2-1/2	4	±.015	±.015
4	6	±.020	±.020

Outside Diameter

OVER	UP TO & INCL.	OILITE/OILITE PLUS	SUPER OILITE
-	1-1/2	±.010	±.010
1-1/2	3	±.015	±.015
3	4-1/2	±.020	±.020
4-1/2	6	±.025	±.025

Thickness

OVER	UP TO & INCL.	OILITE/OILITE PLUS	SUPER OILITE
1/32	1/4	±.0025	±.005


Parallelism of Faces — Based on OD

OVER	UP TO & INCL.	OILITE/OILITE PLUS	SUPER OILITE
-	1-1/2	.002	.003
1-1/2	3-1/2	.003	.004
3-1/2	6	.004	.005

CHAMFERS

Recommended Bearing Chamfers


RANGE	MINIMUM CHAMFER SIZE	TYPE
ALL THIN WALLS UP TO AND INCLUDING 1/16	ROUNDED END (1/64 "TRUE RADIUS")	A
ON WALLS GREATER THAN 1/16 UP TO 3" O.D.	1/64 X 45°	B
ON ALL BEARINGS 3" O.D. AND OVER	1/32 X 45°	B

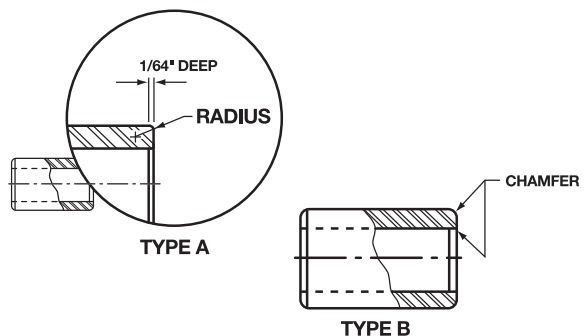

PRESS FIT VALUES / BEARING CLEARANCE / ID CLOSE-IN

PRESS FIT VALUES

Oilite and Super Oilite Bearings

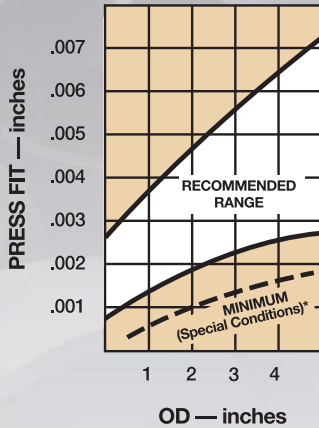


Considerable force is required to seat large bearings when press fit approaches the top of the recommended range.

*Less than normal press fit proves satisfactory:


- (1) if the bearing is long and the wall is not exceptionally thin, and
- (2) if the bearing is also carrying a moderate load exerted only in one direction.

BEARING CLEARANCE

Oilite

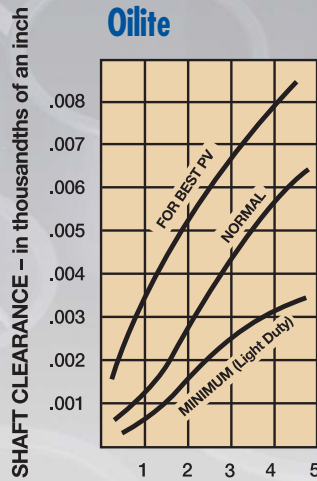


Super Oilite

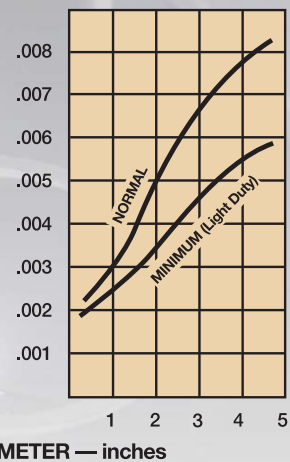


ID CLOSE-IN

As Related to Wall Thickness (Approximate Values) for Normal Press Fit

Oilite Bearings

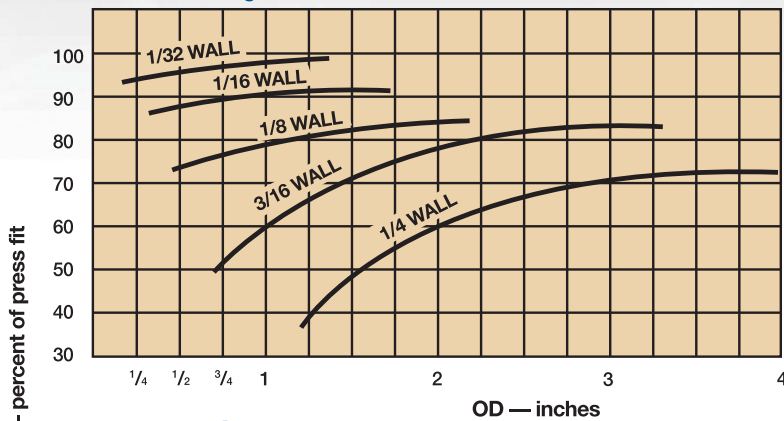

Super Oilite Bearings

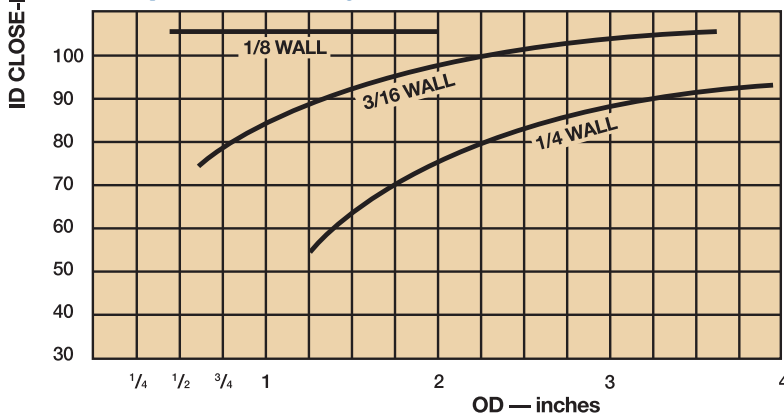



Oilite[®]/Oilite Plus[®]
BEARINGS



oilite[®]

Oilite®/Oilite Plus®

SLEEVE BEARINGS



	ID	OD	LENGTH	PART NO.
1/8 X 3/16	.125	.190	5/32	AA-101-8
NOMINAL	.124	.189	1/4	AA-101-2
			3/8	AA-101
			1/2	AA-101-1
	.1265	.1895	1/8	AA-110-1
	.1255	.1885	1/4	AA-110-2
			5/16	AA-110-4
			1/2	AA-110-3
	.127	.1905	1/4	AA-102-1
	.126	.1895	1/2	AA-102-2
1/8 X 7/32	.127	.222	1/4	AA-223
NOMINAL	.126	.221	3/8	AA-223-1
1/8 X 1/4	.127	.253	1/8	AA-227-1
NOMINAL	.126	.252	1/4	AA-227-2
			3/8	AA-227-3
			1/2	AA-227-4
	.128	.253	1/4	AA-224
	.127	.252	3/8	AA-224-1
1/8 X 3/8	.127	.377	1/4	AA-337-2
NOMINAL	.126	.376	1/2	AA-337-3
5/32 X 7/32	.156	.220	1/4	AA-211
NOMINAL	.155	.219	3/8	AA-211-1
5/32 X 1/4	.1565	.2525	3/8	AA-238
NOMINAL	.1555	.2515		
	.159	.253	1/4	AA-204-1
	.158	.252	5/16	AA-204
3/16 X 1/4	.1875	.252	1/4	AA-225-2
NOMINAL	.1865	.251	5/16	AA-225-1
			3/8	AA-225-6
			1/2	AA-225-4
			5/8	AA-225-3
	.1885	.252	1/4	AA-226-1
	.1875	.251	3/8	AA-226-2
			7/16	AA-226
			1/2	AA-226-3
			5/8	AA-226-4
	.1895	.253	1/4	AA-228-1
	.1885	.252	3/8	AA-228-2
			1/2	AA-228-3
			5/8	AA-228-4
			3/4	AA-228-6
3/16 X 5/16	.1885	.3145	3/16	AA-309-9
NOMINAL	.1875	.3135	1/4	AA-309
			5/16	AA-309-3
			3/8	AA-309-4
			7/16	AA-309-8
			1/2	AA-309-14
			5/8	AA-309-7
			3/4	AA-309-5
	.1895	.3145	3/16	AA-331
	.1885	.3135	1/4	AA-331-2
			3/8	AA-331-3
	.1895	.3145	3/16	AP-331
	.1885	.3135	1/4	AP-331-2
			3/8	AP-331-3
	.1895	.3155	3/16	AA-311-1
	.1885	.3145	1/4	AA-311-2
			5/16	AA-311-3
			3/8	AA-311-4
			1/2	AA-311-5
			5/8	AA-311-6
			3/4	AA-311-7
			1	AA-311-8

	ID	OD	LENGTH	PART NO.
3/16 X 3/8	.1885	.3775	1/4	AA-346-1
NOMINAL	.1875	.3765	3/8	AA-346-2
			1/2	AA-346
	.1895	.378	1/4	AA-305-1
	.1885	.377	3/8	AA-305-2
			1/2	AA-305-3
			5/8	AA-305-4
			3/4	AA-305-5
7/32 X 5/16	.219	.3145	5/16	AA-318
NOMINAL	.218	.3135	3/8	AA-318-1
7/32 X 7/16	.219	.440	1/2	AA-410-2
NOMINAL	.218	.439	3/4	AA-410-3
1/4 X 5/16	.2505	.3145	1/4	AA-397-1
NOMINAL	.2495	.3135	1/2	AA-397
	.2515	.3155	1/4	AA-347-2
	.2505	.3145	3/8	AA-347-3
			1/2	AA-347-1
	.252	.3155	1/4	AA-334-1
	.251	.3145	3/8	AA-334-2
			1/2	AA-334-3
			5/8	AA-334-4
			3/4	AA-334-5
	.253	.3155	1/2	AA-335-4
	.252	.3145	5/8	AA-335-6
			3/4	AA-335-5
1/4 X 3/8	.2505	.377	1/4	AA-304-35
NOMINAL	.2495	.376	5/16	AA-304-9
			3/8	AA-304-7
			7/16	AA-304-24
			1/2	AA-304-2
			9/16	AA-304-5
			5/8	AA-304-1
			3/4	AA-304-22
			7/8	AA-304-21
			1	AA-304-20
			1-1/8	AA-304-33
			1-1/4	AA-304-11
	.252	.377	1/4	AA-307
	.251	.376	5/16	AA-307-1
			3/8	AA-307-9
			1/2	AA-307-3
			5/8	AA-307-10
			3/4	AA-307-11
			7/8	AA-307-7
			1	AA-307-2
			1-1/8	AA-307-13
	.252	.378	1/4	AA-340-1
	.251	.377	5/16	AA-340-2
			3/8	AA-340-3
			7/16	AA-340-4
			1/2	AA-340-5
			5/8	AA-340-6
			3/4	AA-340-7
			7/8	AA-340-8
			1	AA-340-9
			1-1/8	AA-340-10
			1-1/4	AA-340-11
	.253	.377	1/4	AA-385-1
	.252	.376	1/2	AA-385
			3/4	AA-385-2
1/4 X 7/16	.251	.4395	3/8	AA-430
NOMINAL	.250	.4385	1/2	AA-430-1
			5/8	AA-430-5
			3/4	AA-430-2

	ID	OD	LENGTH	PART NO.
1/4 X 7/16	.251	.4395	7/8	AA-430-6
NOMINAL	.250	.4385	1	AA-430-3
(CONT.)	.252	.4395	3/8	AA-412-10
	.251	.4385	1/2	AA-412-7
			5/8	AA-412-6
			3/4	AA-412-1
			1	AA-412-8
	.252	.4405	3/8	AA-419-1
	.251	.4395	1/2	AA-419-2
			5/8	AA-419-3
			3/4	AA-419-4
			7/8	AA-419-5
			1	AA-419-6
1/4 X 1/2	.252	.5015	5/16	AA-519-4
NOMINAL	.251	.5005	1/2	AA-519-1
			3/4	AA-519-2
			1	AA-519-3
	.252	.503	5/16	AA-429-1
	.251	.502	1/2	AA-429-2
			3/4	AA-429-3
			1	AA-429-4
			1-1/4	AA-429-5
5/16 X 3/8	.3135	.377	1/4	AA-306-11
NOMINAL	.3125	.376	5/16	AA-306-1
			3/8	AA-306-3
			1/2	AA-306-7
			5/8	AA-306-8
			3/4	AA-306-6
	.3145	.378	1/4	AA-360-1
	.3135	.377	3/8	AA-360-2
			1/2	AA-360-3
			5/8	AA-360-4
			3/4	AA-360-5
			7/8	AA-360-6
			1	AA-360-7
5/16 X 7/16	.3115	.441	3/8	AA-403
NOMINAL	.3105	.440	1/2	AA-403-2
	.3125	.440	1/4	AA-407-1
	.3115	.439	5/16	AA-407-10
			3/8	AA-407-7
			1/2	AA-407-3
			5/8	AA-407-2
			3/4	AA-407-4
	.3135	.4395	1/4	AA-401-17
	.3125	.4385	5/16	AA-401-25
			3/8	AA-401-2
			7/16	AA-401-20
			1/2	AA-401-3
			5/8	AA-401-21
			11/16	AA-401-11
			3/4	AA-401-5
			7/8	AA-401-12
			1	AA-401-1
			1-1/8	AA-401
			1-1/4	AA-401-6
			1-3/8	AA-401-8
	.3135	.4395	1/4	AP-401-17
	.3125	.4385	3/8	AP-401-2
			1/2	AP-401-3
			5/8	AP-401-21
			3/4	AP-401-5
	.3145	.440	1/4	AA-418-1
	.3135	.439	3/8	AA-418-2
			1/2	AA-418-3
			5/8	AA-418-4

Note: The "AP-" prefix indicates Oilite Plus. All sizes can be special ordered in Oilite Plus.



Oilite®/Oilite Plus®

SLEEVE BEARINGS

ID	OD	LENGTH	PART NO.
5/16X7/16	.3145	.4405	1/4 AA-470-1
NOMINAL	.3135	.4395	5/16 AA-470-2
(CONT.)			3/8 AA-470-3
			1/2 AA-470-4
			5/8 AA-470-5
			3/4 AA-470-6
			7/8 AA-470-7
			1 AA-470-8
			1-1/8 AA-470-9
			1-1/4 AA-470-10
	.3155	.4395	1/4 AA-417-7
	.3145	.4385	1/2 AA-417
			3/4 AA-417-3
5/16X1/2	.3125	.503	3/8 AA-520-8
NOMINAL	.3115	.502	1/2 AA-520-3
			5/8 AA-520-4
			3/4 AA-520-1
			7/8 AA-520-2
			1 AA-520-5
	.314	.503	1/4 AA-506-16
	.313	.502	3/8 AA-506-2
			1/2 AA-506-7
			9/16 AA-506-1
			5/8 AA-506-3
			3/4 AA-506-8
			1 AA-506-9
	.3145	.503	3/8 AA-560-1
	.3135	.502	1/2 AA-560-2
			5/8 AA-560-3
			3/4 AA-560-4
			7/8 AA-560-5
			1 AA-560-6
			1-1/4 AA-560-7
			1-1/2 AA-560-8
3/8X7/16	.3765	.440	1/4 AA-432-4
NOMINAL	.3755	.439	3/8 AA-432-2
			1/2 AA-432-1
			3/4 AA-432-3
	.377	.4405	1/2 AA-431-1
	.376	.4395	5/8 AA-431-2
			3/4 AA-431-3
			1 AA-431-4
3/8X1/2	.375	.503	1/4 AA-521-4
NOMINAL	.374	.502	3/8 AA-521-9
			7/16 AA-521-8
			1/2 AA-521-1
			5/8 AA-521-10
			3/4 AA-521
			7/8 AA-521-2
			1 AA-521-11
			1-1/4 AA-521-12
	.3765	.503	3/16 AA-507-12
	.3755	.502	1/4 AA-507-19
			5/16 AA-507-13
			3/8 AA-507-11
			7/16 AA-507-4
			1/2 AA-507-10
			5/8 AA-507-5
			3/4 AA-507-2
			7/8 AA-507-3
			1 AA-507-23
			1-1/8 AA-507-17
	.377	.503	1/4 AA-508-1
	.376	.502	5/16 AA-508-2

ID	OD	LENGTH	PART NO.
3/8X1/2	.377	.503	3/8 AA-508-3
NOMINAL	.376	.502	7/16 AA-508-4
(CONT.)			1/2 AA-508-5
			5/8 AA-508-6
			3/4 AA-508-7
			7/8 AA-508-8
			1 AA-508-9
			1-1/8 AA-508-10
			1-1/4 AA-508-11
	.378	.5025	1/4 AA-502-5
	.377	.5015	3/8 AA-502-4
			1/2 AA-502
			5/8 AA-502-3
			3/4 AA-502-1
			1 AA-502-2
	.378	.5025	1/4 AP-502-5
	.377	.5015	3/8 AP-502-4
			1/2 AP-502
			5/8 AP-502-3
			3/4 AP-502-1
			1 AP-502-2
3/8X9/16	.3765	.5655	3/8 AA-516-5
NOMINAL	.3755	.5645	1/2 AA-516-6
			9/16 AA-516-3
			11/16 AA-516
			3/4 AA-516-10
			1 AA-516-8
			1-1/4 AA-516-2
	.377	.5655	3/8 AA-572-1
	.376	.5645	1/2 AA-572-2
			5/8 AA-572-3
			3/4 AA-572-4
			7/8 AA-572-5
			1 AA-572-6
			1-1/4 AA-572-7
3/8X5/8	.376	.627	3/8 AA-630-8
NOMINAL	.375	.626	7/16 AA-630-16
			1/2 AA-630-11
			5/8 AA-630-6
			3/4 AA-630-12
			7/8 AA-630
			1 AA-630-7
			1-1/8 AA-630-1
			1-1/4 AA-630-2
	.377	.628	3/8 AA-624-1
	.376	.627	1/2 AA-624-2
			5/8 AA-624-3
			3/4 AA-624-4
			7/8 AA-624-5
			1 AA-624-6
			1-1/4 AA-624-7
3/8X11/16	.3765	.689	3/4 AA-615
NOMINAL	.3755	.688	1-1/2 AA-615-2
3/8X3/4	.377	.753	3/8 AA-707-5
NOMINAL	.376	.752	1/2 AA-707-2
			3/4 AA-707-3
			1 AA-707
			1-1/4 AA-707-4
7/16X9/16	.439	.565	5/16 AA-515-1
NOMINAL	.438	.564	3/8 AA-515-21
			1/2 AA-515-2
			5/8 AA-515-3
			3/4 AA-515
			13/16 AA-515-12
			15/16 AA-515-6
			1 AA-515-8

ID	OD	LENGTH	PART NO.
7/16X9/16	.4395	.5655	3/8 AA-514-1
NOMINAL	.4385	.5645	1/2 AA-514-2
(CONT.)			5/8 AA-514-3
			3/4 AA-514-4
			1 AA-514-5
			1-1/4 AA-514-6
7/16X5/8	.439	.627	3/8 AA-627-5
NOMINAL	.438	.626	7/16 AA-627-13
			1/2 AA-627-8
			5/8 AA-627-3
			3/4 AA-627
			1 AA-627-4
			1-1/4 AA-627-1
			1-1/2 AA-627-7
	.4395	.628	3/8 AA-626-1
	.4385	.627	1/2 AA-626-2
			5/8 AA-626-3
			3/4 AA-626-4
			7/8 AA-626-5
			1 AA-626-6
			1-1/4 AA-626-7
			1-1/2 AA-626-8
7/16X11/16	.4395	.6905	1/2 AA-604-1
NOMINAL	.4385	.6895	1 AA-604-2
			1-1/2 AA-604-3
1/2X5/8	.5015	.628	5/16 AA-628-21
NOMINAL	.5005	.627	3/8 AA-628-7
			7/16 AA-628-8
			1/2 AA-628-10
			9/16 AA-628-3
			5/8 AA-628-25
			11/16 AA-628-12
			3/4 AA-628-6
			7/8 AA-628-20
			1 AA-628
			1-1/4 AA-628-11
			1-1/2 AA-628-5
	.5015	.628	5/16 AP-628-21
	.5005	.627	3/8 AP-628-7
			7/16 AP-628-8
			1/2 AP-628-10
			5/8 AP-628-25
			3/4 AP-628-6
			1 AP-628
	.502	.628	3/8 AA-632-1
	.501	.627	7/16 AA-632-7
			1/2 AA-632-2
			9/16 AA-632-8
			5/8 AA-632-3
			11/16 AA-632-9
			3/4 AA-632-4
			7/8 AA-632-5
			1 AA-632-6
			1-1/8 AA-632-10
			1-1/4 AA-632-11
			1-1/2 AA-632-12
	.5025	.629	1/2 AA-607-1
	.5015	.628	5/8 AA-607-2
			3/4 AA-607-5
			1 AA-607-3
			1-1/4 AA-607-6
	.504	.6275	1/2 AA-634-4
	.503	.6265	1 AA-634-5

Note: The "AP-" prefix indicates Oilite Plus. All sizes can be special ordered in Oilite Plus.

Oilite®/Oilite Plus®

SLEEVE BEARINGS



	ID	OD	LENGTH	PART NO.
1/2X11/16	.5015	.690	3/8	AA-650-4
NOMINAL	.5005	.689	1/2	AA-650-1
			9/16	AA-650-6
			5/8	AA-650-9
			3/4	AA-650
			7/8	AA-650-7
			1	AA-650-2
			1-1/8	AA-650-5
			1-1/4	AA-650-12
			1-1/2	AA-650-3
	.502	.6905	3/8	AA-652-1
	.501	.6895	1/2	AA-652-2
			5/8	AA-652-3
			3/4	AA-652-4
			7/8	AA-652-5
			1	AA-652-6
			1-1/8	AA-652-7
			1-1/4	AA-652-8
			1-1/2	AA-652-9
	.5025	.689	3/8	AA-631-13
	.5015	.688	3/4	AA-631
			1-1/4	AA-631-1
	.504	.690	1/4	AA-618-16
	.503	.689	1/2	AA-618-1
			9/16	AA-618-13
			5/8	AA-618-12
			3/4	AA-618-11
			7/8	AA-618-8
			1	AA-618-6
			1-1/8	AA-618-2
			1-3/8	AA-618-5
1/2X3/4	.5005	.752	1/2	AA-742-1
NOMINAL	.4995	.751	3/4	AA-742-2
			1	AA-742
			1-1/8	AA-742-4
			1-1/4	AA-742-3
	.5015	.752	1/2	AA-753
	.5005	.751	9/16	AA-753-1
			3/4	AA-753-5
			1	AA-753-2
			1-1/2	AA-753-4
	.502	.753	3/8	AA-751
	.501	.752	1/2	AA-751-1
			5/8	AA-751-2
			3/4	AA-751-3
			7/8	AA-751-4
			1	AA-751-5
			1-1/8	AA-751-6
			1-1/4	AA-751-7
			1-1/2	AA-751-8
			1-3/4	AA-751-9
			2	AA-751-10
	.5025	.753	1/2	AA-744-5
	.5015	.752	5/8	AA-744-9
			3/4	AA-744-4
			7/8	AA-744-10
			1	AA-744-3
			1-1/4	AA-744
			1-1/2	AA-744-1
			1-3/4	AA-744-2
	.5025	.753	1/2	AP-744-5
	.5015	.752	5/8	AP-744-9
			3/4	AP-744-4
			7/8	AP-744-10
			1	AP-744-3

	ID	OD	LENGTH	PART NO.
1/2X13/16	.501	.815	3/4	AA-886-3
NOMINAL	.500	.814	1	AA-886-1
			1-1/2	AA-886-4
	.502	.8165	1/2	AA-887-14
	.501	.8155	3/4	AA-887-2
			1	AA-887-3
			1-1/2	AA-887-4
1/2X7/8	.502	.879	1/2	AA-840-1
NOMINAL	.501	.878	5/8	AA-840-2
			3/4	AA-840-3
			7/8	AA-840-4
			1	AA-840-5
			1-1/4	AA-840-6
			1-1/2	AA-840-7
	.503	.879	1/2	AA-842-7
	.502	.878	3/4	AA-842-4
			1	AA-842-3
			1-1/4	AA-842-2
			1-1/2	AA-842
1/2X1	.502	1.004	3/4	AA-816-1
NOMINAL	.501	1.003	1	AA-816-2
			1-1/2	AA-816-3
			2	AA-816-4
9/16X11/16	.5635	.691	7/16	AA-620-3
NOMINAL	.5625	.690	1/2	AA-620-7
			5/8	AA-620-8
			3/4	AA-620-1
			1	AA-620
			1-1/4	AA-620-5
	.5645	.6905	1/2	AA-621-1
	.5635	.6895	5/8	AA-621-2
			3/4	AA-621-3
			1	AA-621-4
			1-1/4	AA-621-5
			1-1/2	AA-621-6
9/16X3/4	.5635	.7535	1/2	AA-711-7
NOMINAL	.5625	.7525	5/8	AA-711-6
			3/4	AA-711-1
			1	AA-711-3
			1-1/4	AA-711-5
			1-3/8	AA-711
			1-1/2	AA-711-2
	.5645	.753	1/2	AA-712-1
	.5635	.752	3/4	AA-712-2
			1	AA-712-3
			1-1/4	AA-712-4
	.566	.753	1/2	AA-709-7
	.565	.752	3/4	AA-709-8
			1	AA-709
			1-1/4	AA-709-5
			1-1/2	AA-709-6
9/16X13/16	.563	.815	3/4	AA-807-3
NOMINAL	.562	.814	1	AA-807-2
			1-1/4	AA-807-4
9/16X7/8	.567	.877	1	AA-863-3
NOMINAL	.566	.876	1-3/8	AA-863
5/8X3/4	.626	.753	1/2	AA-724-8
NOMINAL	.625	.752	7/8	AA-724-2
			1	AA-724-3
			1-1/8	AA-724
			1-1/4	AA-724-5

	ID	OD	LENGTH	PART NO.
5/8X3/4	.627	.752	1/2	AA-741
NOMINAL	.626	.751	5/8	AA-741-1
(CONT.)			3/4	AA-741-4
	.627	.753	3/8	AA-710-13
	.626	.752	1/2	AA-710-27
			5/8	AA-710-19
			3/4	AA-710-6
			7/8	AA-710-16
			1	AA-710-3
			1-1/8	AA-710-8
			1-1/4	AA-710-5
			1-1/2	AA-710-4
	.627	.753	1/2	AP-710-27
	.626	.752	5/8	AP-710-19
			3/4	AP-710-6
			7/8	AP-710-16
			1	AP-710-3
	.628	.753	1/2	AA-713-1
	.627	.752	5/8	AA-713-2
			3/4	AA-713-3
			7/8	AA-713-4
			1	AA-713-5
5/8X13/16	.625	.815	1/2	AA-810-4
NOMINAL	.624	.814	5/8	AA-810-2
			3/4	AA-810-10
			7/8	AA-810-1
			1	AA-810-7
			1-1/4	AA-810-11
			1-3/8	AA-810
			1-1/2	AA-810-12
	.627	.815	3/4	AA-811-7
	.626	.814	1	AA-811-6
			1-1/4	AA-811-2
			1-3/8	AA-811-5
			1-1/2	AA-811-3
			1-3/4	AA-811-1
	.627	.8165	1/2	AA-813-1
	.626	.8155	5/8	AA-813-2
			3/4	AA-813-3
			7/8	AA-813-4
			1	AA-813-5
			1-1/4	AA-813-6
			1-1/2	AA-813-7
			1-3/4	AA-813-8
	.628	.8155	5/8	AA-814-3
	.627	.8145	3/4	AA-814-2
			1	AA-814
			1-1/4	AA-814-5
5/8X7/8	.625	.877	1/2	AA-880-4
NOMINAL	.624	.876	3/4	AA-880-2
			1	AA-880-1
			1-1/2	AA-880
	.627	.878	1/2	AA-832-11
	.626	.877	5/8	AA-832-12
			3/4	AA-832-6
			7/8	AA-832-8
			1	AA-832-1
			1-1/8	AA-832-13
			1-1/4	AA-832-4
			1-3/8	AA-832-2
			1-1/2	AA-832-5
			1-5/8	AA-832-9
			2	AA-832-18
	.627	.878	1/2	AP-832-11
	.626	.877	5/8	AP-832-12

Note: The "AP-" prefix indicates Oilite Plus. All sizes can be special ordered in Oilite Plus.



Oilite®/Oilite Plus®

SLEEVE BEARINGS

	ID	OD	LENGTH	PART NO.
5/8X7/8	.627	.878	3/4	AP-832-6
NOMINAL	.626	.877	7/8	AP-832-8
(CONT.)			1	AP-832-1
	.627	.879	1/2	AA-883-1
	.626	.878	5/8	AA-883-2
			3/4	AA-883-3
			7/8	AA-883-4
			1	AA-883-5
			1-1/8	AA-883-6
			1-1/4	AA-883-7
			1-1/2	AA-883-8
			1-3/4	AA-883-9
			2	AA-883-10
	.628	.878	1/2	AA-881-1
	.627	.877	5/8	AA-881-2
			3/4	AA-881-3
			7/8	AA-881-4
			1	AA-881-5
5/8 X 15/16	.628	.940	5/8	AA-946-4
NOMINAL	.627	.939	3/4	AA-946-2
			1	AA-946-1
5/8X1	.627	1.004	1/2	AA-1014-1
NOMINAL	.626	1.003	5/8	AA-1014-2
			3/4	AA-1014-3
			1	AA-1014-4
			1-1/4	AA-1014-5
			1-1/2	AA-1014-6
			1-3/4	AA-1014-7
			2	AA-1014-8
	.628	1.0035	3/4	AA-1011-12
	.627	1.0025	7/8	AA-1011-5
			1	AA-1011-3
			1-1/8	AA-1011-4
			1-1/4	AA-1011-1
			1-3/8	AA-1011-13
			1-1/2	AA-1011
11/16X13/16	.6885	.815	1	AA-812-1
NOMINAL	.6875	.814	1-1/4	AA-812
11/16X7/8	.6895	.879	3/4	AA-857-1
NOMINAL	.6885	.878	1	AA-857-2
			1-1/4	AA-857-3
			1-1/2	AA-857-4
			1-3/4	AA-857-5
			2	AA-857-6
	.690	.878	1/2	AA-851-2
	.689	.877	3/4	AA-851-7
			1	AA-851-8
			1-1/8	AA-851-6
			1-1/4	AA-851-1
11/16X15/16	.689	.941	1	AA-939-3
NOMINAL	.688	.940	1-1/4	AA-939-2
			1-1/2	AA-939-4
3/4X7/8	.751	.878	1/2	AA-838-14
NOMINAL	.750	.877	9/16	AA-838-9
			5/8	AA-838-25
			3/4	AA-838-16
			7/8	AA-838-6
			1	AA-838-7
			1-1/8	AA-838-13
			1-1/4	AA-838-5
			1-3/8	AA-838-15
			1-1/2	AA-838-4
			1-5/8	AA-838-8

	ID	OD	LENGTH	PART NO.
3/4X7/8	.752	.878	3/4	AA-885
NOMINAL	.751	.877	1	AA-885-3
(CONT.)			1-1/4	AA-885-4
	.752	.879	1/2	AA-884-1
	.751	.878	9/16	AA-884-2
			5/8	AA-884-3
			3/4	AA-884-4
			7/8	AA-884-5
			1	AA-884-6
			1-1/8	AA-884-7
			1-1/4	AA-884-8
			1-1/2	AA-884-9
			1-5/8	AA-884-10
	.753	.878	1/2	AA-839-14
	.752	.877	5/8	AA-839-1
			11/16	AA-839-3
			3/4	AA-839-6
			1	AA-839-13
			1-1/8	AA-839-2
			1-1/4	AA-839-4
			1-1/2	AA-839-7
	.753	.878	5/8	AP-839-1
	.752	.877	3/4	AP-839-6
			1	AP-839-13
3/4X15/16	.7515	.940	3/4	AA-921-5
NOMINAL	.7505	.939	1	AA-921-4
			1-1/8	AA-921-2
			1-1/4	AA-921-3
			1-1/2	AA-921-1
			1-3/4	AA-921
			2	AA-921-6
	.752	.9415	1/2	AA-932-1
	.751	.9405	5/8	AA-932-2
			3/4	AA-932-3
			7/8	AA-932-4
			1	AA-932-5
			1-1/8	AA-932-6
			1-1/4	AA-932-7
			1-1/2	AA-932-8
			1-3/4	AA-932-9
			2	AA-932-10
	.752	.942	1	AA-912
	.751	.941	1-1/4	AA-912-4
			1-3/8	AA-912-1
			1-1/2	AA-912-6
			1-5/8	AA-912-2
			1-3/4	AA-912-7
3/4X1	.7505	1.0025	3/4	AA-1005-5
NOMINAL	.7495	1.0015	1	AA-1005-7
			1-1/8	AA-1005-3
			1-1/4	AA-1005-2
			1-1/2	AA-1005-4
	.752	1.0025	3/8	AA-1049-18
	.751	1.0015	1/2	AA-1049-14
			5/8	AA-1049-7
			3/4	AA-1049-1
			7/8	AA-1049-2
			1	AA-1049-3
			1-1/8	AA-1049-16
			1-1/4	AA-1049
			1-3/8	AA-1049-17
			1-1/2	AA-1049-4
			1-3/4	AA-1049-9
			2	AA-1049-5

	ID	OD	LENGTH	PART NO.
3/4X1	.752	1.0025	2-1/8	AA-1049-11
NOMINAL	.751	1.0015	2-1/4	AA-1049-12
(CONT.)			2-1/2	AA-1049-6
	.752	1.004	1/2	AA-1044-1
	.751	1.003	5/8	AA-1044-2
			3/4	AA-1044-3
			7/8	AA-1044-4
			1	AA-1044-5
			1-1/8	AA-1044-6
			1-1/4	AA-1044-7
			1-1/2	AA-1044-8
			1-3/4	AA-1044-9
			2	AA-1044-10
			2-1/2	AA-1044-11
	.753	1.003	1/2	AA-1043-1
	.752	1.002	5/8	AA-1043-2
			3/4	AA-1043-6
			7/8	AA-1043-8
			1	AA-1043-9
			1-1/4	AA-1043
			1-1/2	AA-1043-4
			1-3/4	AA-1043-10
	.753	1.003	1/2	AP-1043-1
	.752	1.002	5/8	AP-1043-2
			3/4	AP-1043-6
			1	AP-1043-9
			1-1/4	AP-1043
3/4X1-1/16	.751	1.0645	1	AA-1039
NOMINAL	.750	1.0635	1-1/4	AA-1039-2
3/4X1-1/8	.750	1.129	3/4	AA-1130-3
NOMINAL	.749	1.128	1-1/4	AA-1130
	.752	1.129	1/2	AA-1131-1
	.751	1.128	3/4	AA-1131-2
			1	AA-1131-3
			1-1/4	AA-1131-4
			1-1/2	AA-1131-5
			1-3/4	AA-1131-6
			2	AA-1131-7
	.753	1.128	3/4	AA-1106-2
	.752	1.127	1	AA-1106-4
			1-1/4	AA-1106-3
			1-3/8	AA-1106-13
			1-1/2	AA-1106
			1-3/4	AA-1106-1
3/4X1-1/4	.752	1.254	3/4	AA-1258-1
NOMINAL	.751	1.253	1	AA-1258-2
			1-1/4	AA-1258-3
			1-1/2	AA-1258-4
	.753	1.253	1	AA-1257
	.752	1.252	1-1/4	AA-1257-1
			1-1/2	AA-1257-2
			3	AA-1257-3
13/16X1	.8135	1.003	1	AA-1056-5
NOMINAL	.8125	1.002	1-1/4	AA-1056-3
			1-3/4	AA-1056
	.8145	1.003	7/8	AA-1041-2
	.8135	1.002	1	AA-1041-5
			1-1/4	AA-1041-6
7/8X1	.876	1.003	3/8	AA-1008-11
NOMINAL	.875	1.002	7/16	AA-1008-14
			1/2	AA-1008-9
			5/8	AA-1008-13
			3/4	AA-1008-5
			1	AA-1008-6

Note: The "AP" prefix indicates Oilite Plus. All sizes can be special ordered in Oilite Plus.

Oilite®/Oilite Plus®

SLEEVE BEARINGS



	ID	OD	LENGTH	PART NO.
7/8X1	.876	1.003	1-1/4	AA-1008-1
NOMINAL (CONT.)	.875	1.002	1-1/2	AA-1008-2
			1-3/4	AA-1008-10
	.877	1.003	1/2	AA-1009-1
	.876	1.002	5/8	AA-1009-5
			3/4	AA-1009-8
			1	AA-1009-3
			1-1/8	AA-1009
			1-1/4	AA-1009-2
	.877	1.003	1/2	AP-1009-1
	.876	1.002	5/8	AP-1009-5
			3/4	AP-1009-8
			1	AP-1009-3
	.877	1.004	5/8	AA-1010-1
	.876	1.003	3/4	AA-1010-2
			7/8	AA-1010-3
			1	AA-1010-4
			1-1/4	AA-1010-5
			1-1/2	AA-1010-6
			1-3/4	AA-1010-7
	.878	1.003	1/2	AA-1007-1
	.877	1.002	3/4	AA-1007-2
			7/8	AA-1007-3
			1	AA-1007-4
7/8X1-1/16	.877	1.065	3/4	AA-1051-3
NOMINAL	.876	1.064	1	AA-1051-4
			1-1/4	AA-1051-2
7/8X1-1/8	.876	1.128	3/4	AA-1108
NOMINAL	.875	1.127	7/8	AA-1108-15
			1	AA-1108-1
			1-1/8	AA-1108-2
			1-1/4	AA-1108-7
			1-3/8	AA-1108-16
			1-1/2	AA-1108-12
			1-3/4	AA-1108-10
			2	AA-1108-3
			2-1/4	AA-1108-11
			2-1/2	AA-1108-5
			2-3/4	AA-1108-6
	.877	1.129	3/4	AA-1109-1
	.876	1.128	7/8	AA-1109-2
			1	AA-1109-3
			1-1/8	AA-1109-4
			1-1/4	AA-1109-5
			1-3/8	AA-1109-6
			1-1/2	AA-1109-7
			1-3/4	AA-1109-8
			2	AA-1109-9
			2-1/2	AA-1109-10
	.878	1.1275	3/4	AA-1104-1
	.877	1.1265	7/8	AA-1104-6
			1	AA-1104-2
			1-1/4	AA-1104-5
			1-3/8	AA-1104-4
			1-1/2	AA-1104-3
	.878	1.1275	3/4	AP-1104-1
	.877	1.1265	7/8	AP-1104-6
			1	AP-1104-2
			1-1/4	AP-1104-5
7/8X1-1/4	.877	1.252	1	AA-1203-3
NOMINAL	.876	1.251	1-1/4	AA-1203
			1-1/2	AA-1203-1
	.877	1.254	3/4	AA-1243-1
	.876	1.253	1	AA-1243-2

	ID	OD	LENGTH	PART NO.
7/8X1-1/4	.877	1.252	1-1/4	AA-1243-3
NOMINAL (CONT.)	.876	1.251	1-1/2	AA-1243-4
			2	AA-1243-5
	.878	1.253	3/4	AA-1242-2
	.877	1.252	1	AA-1242-3
			1-3/8	AA-1242
15/16X1-1/16	.940	1.065	3/4	AA-1087-1
NOMINAL	.939	1.064	1-1/4	AA-1087
15/16X1-3/16	.939	1.1895	7/8	AA-1118-6
NOMINAL	.938	1.1885	1	AA-1118-4
			1-1/4	AA-1118-2
			1-1/2	AA-1118-5
	.9395	1.1915	3/4	AA-1117-1
	.9385	1.1905	1	AA-1117-2
			1-1/4	AA-1117-3
			1-1/2	AA-1117-4
			2	AA-1117-5
15/16X1-1/4	.9375	1.253	1	AA-1206-1
NOMINAL	.9365	1.252	1-1/4	AA-1206-4
			1-1/2	AA-1206-2
	.9395	1.254	3/4	AA-1207-1
	.9385	1.253	1	AA-1207-2
			1-1/4	AA-1207-3
			1-1/2	AA-1207-4
			1-3/4	AA-1207-5
			2	AA-1207-6
	.940	1.254	1-1/2	AA-1216-3
	.939	1.253	2	AA-1216
1X1-1/8	1.001	1.128	1/2	AA-1110-8
NOMINAL	1.000	1.127	3/4	AA-1110-10
			13/16	AA-1110-2
			1	AA-1110-1
			1-1/4	AA-1110-3
			1-3/8	AA-1110-12
			1-1/2	AA-1110
	1.003	1.129	3/4	AA-1157-1
	1.002	1.128	7/8	AA-1157-2
			1	AA-1157-3
			1-1/4	AA-1157-4
			1-1/2	AA-1157-6
			1-3/4	AA-1157-7
			2	AA-1157-8
	1.0035	1.128	3/4	AA-1156
	1.0025	1.127	7/8	AA-1156-4
			1-1/4	AA-1156-3
			1-1/2	AA-1156-1
1X1-3/16	1.002	1.1895	3/4	AA-1154-2
NOMINAL	1.001	1.1885	1	AA-1154-1
			1-1/2	AA-1154-3
			2	AA-1154
	1.003	1.1915	3/4	AA-1159-1
	1.002	1.1905	1	AA-1159-2
			1-1/4	AA-1159-3
			1-1/2	AA-1159-4
			1-3/4	AA-1159-5
			2	AA-1159-6
1X1-1/4	1.001	1.252	1/2	AA-1212-7
NOMINAL	1.000	1.251	3/4	AA-1212-6
			1	AA-1212-2
			1-1/4	AA-1212-16
			1-1/2	AA-1212-11
			1-3/4	AA-1212-4

	ID	OD	LENGTH	PART NO.
1X1-1/4	1.001	1.252	2	AA-1212-3
NOMINAL (CONT.)	1.000	1.251	2-1/4	AA-1212-5
			2-1/2	AA-1212
			2-7/8	AA-1212-8
			3	AA-1212-14
	1.002	1.252	1/2	AA-1213-4
	1.001	1.251	3/4	AA-1213-5
			7/8	AA-1213-6
			1	AA-1213-3
			1-1/8	AA-1213-10
			1-1/4	AA-1213-12
			1-1/2	AA-1213-1
			1-3/4	AA-1213-2
			2	AA-1213
			2-1/2	AA-1213-14
			3	AA-1213-15
	1.003	1.253	1/2	AA-1232-1
	1.002	1.252	5/8	AA-1232-10
			3/4	AA-1232-6
			7/8	AA-1232-9
			1	AA-1232
			1-1/8	AA-1232-2
			1-1/4	AA-1232-3
			1-1/2	AA-1232-7
			1-3/4	AA-1232-8
			2	AA-1232-4
			2-1/2	AA-1232-5
	1.003	1.253	1/2	AP-1232-1
	1.002	1.252	3/4	AP-1232-6
			1	AP-1232
			1-1/4	AP-1232-3
			1-1/2	AP-1232-7
	1.003	1.254	1/2	AA-1233-1
	1.002	1.253	3/4	AA-1233-2
			7/8	AA-1233-3
			1	AA-1233-4
			1-1/4	AA-1233-5
			1-3/8	AA-1233-6
			1-1/2	AA-1233-7
			1-3/4	AA-1233-8
			2	AA-1233-9
			2-1/4	AA-1233-10
			2-1/2	AA-1233-11
			3	AA-1233-12
	1.005	1.2525	1	AA-1204-7
	1.004	1.2515	1-1/4	AA-1204-2
			1-3/8	AA-1204-1
			1-1/2	AA-1204
			2	AA-1204-3
			2-1/4	AA-1204-5
			2-1/2	AA-1204-4
1X1-5/16	1.002	1.315	1	AA-1325-10
NOMINAL	1.001	1.314	1-1/4	AA-1325-8
			1-1/2	AA-1325-4
			1-5/8	AA-1325-7
			1-3/4	AA-1325-5
			2	AA-1325
			2-1/2	AA-1325-1
			2-3/4	AA-1325-3
			3	AA-1325-2
	1.003	1.3165	1	AA-1326-1
	1.002	1.3155	1-1/4	AA-1326-2
			1-1/2	AA-1326-3
			2	AA-1326-4
			3	AA-1326-5

Note: The "AP-" prefix indicates Oilite Plus. All sizes can be special ordered in Oilite Plus.



Oilite®/Oilite Plus®

SLEEVE BEARINGS

	ID	OD	LENGTH	PART NO.
1X1-3/8	1.001	1.378	3/4	AA-1334-3
NOMINAL	1.000	1.377	1-1/4	AA-1334-5
			1-1/2	AA-1334-1
			2	AA-1334-2
	1.003	1.377	1	AA-1310-2
	1.002	1.376	1-1/8	AA-1310-1
			1-1/4	AA-1310-4
			1-3/8	AA-1310
			1-1/2	AA-1310-5
			1-3/4	AA-1310-8
			2	AA-1310-3
			2-1/4	AA-1310-6
	1.003	1.379	1	AA-1311-1
	1.002	1.378	1-1/4	AA-1311-2
			1-1/2	AA-1311-3
			1-3/4	AA-1311-4
			2	AA-1311-5
			2-1/2	AA-1311-6
1X1-1/2	1.003	1.504	1	AA-1510-1
NOMINAL	1.002	1.503	1-1/4	AA-1510-2
			1-1/2	AA-1510-3
			1-3/4	AA-1510-4
			2	AA-1510-5
			2-1/2	AA-1510-6
			3	AA-1510-7
	1.0035	1.5045	1	AA-1511-7
	1.0025	1.5035	1-1/4	AA-1511-8
			1-1/2	AA-1511-5
			2	AA-1511-1
1-1/16X1-5/16	1.064	1.317	3/4	AA-1307-2
NOMINAL	1.063	1.316	1	AA-1307-4
			1-1/4	AA-1307-5
			1-1/2	AA-1307-1
1-1/8X1-1/4	1.1245	1.2535	7/8	AA-1214-6
NOMINAL	1.1235	1.2525	1	AA-1214-3
			1-1/8	AA-1214-2
			1-1/4	AA-1214-1
			1-1/2	AA-1214-8
	1.127	1.2525	1-1/4	AA-1250-2
	1.126	1.2515	1-1/2	AA-1250-3
1-1/8X1-5/16	1.1265	1.3155	1	AA-1317
NOMINAL	1.1255	1.3145	1-1/4	AA-1317-1
	1.128	1.3165	1	AA-1318-1
	1.127	1.3155	1-1/4	AA-1318-2
			1-1/2	AA-1318-3
			1-3/4	AA-1318-4
			2	AA-1318-5
1-1/8X1-3/8	1.127	1.377	1/2	AA-1332-6
NOMINAL	1.126	1.376	3/4	AA-1332-1
			1	AA-1332-4
			1-1/4	AA-1332-9
			1-1/2	AA-1332-7
			1-3/4	AA-1332-10
			2	AA-1332
			2-1/4	AA-1332-11
			2-1/2	AA-1332-2
			3	AA-1332-8
	1.128	1.379	3/4	AA-1320-5
	1.127	1.378	1-1/2	AA-1320-1
			1-3/4	AA-1320-2
			2	AA-1320-3
			2-1/2	AA-1320-4

	ID	OD	LENGTH	PART NO.
1-1/8X1-3/8	1.129	1.379	1/2	AA-1319-10
NOMINAL	1.128	1.378	1	AA-1319-3
(CONT.)			1-1/4	AA-1319
			1-1/2	AA-1319-13
			1-3/4	AA-1319-5
			2	AA-1319-1
			2-1/4	AA-1319-12
			2-1/2	AA-1319-2
1-1/8X1-1/2	1.126	1.503	1	AA-1509-4
NOMINAL	1.125	1.502	1-1/2	AA-1509-1
			1-3/4	AA-1509-6
			2	AA-1509
			2-1/2	AA-1509-3
	1.127	1.5035	1	AA-1502
	1.126	1.5025	1-1/4	AA-1502-2
			1-1/2	AA-1502-3
	1.128	1.504	1	AA-1530-1
	1.127	1.503	1-1/4	AA-1530-2
			1-1/2	AA-1530-3
			1-3/4	AA-1530-4
			2	AA-1530-5
			2-1/2	AA-1530-6
1-3/16X1-5/16	1.189	1.3155	1	AA-1339-2
NOMINAL	1.188	1.3145	1-1/4	AA-1339
1-3/16X1-3/8	1.189	1.379	1-1/2	AA-1324-1
NOMINAL	1.188	1.378	1-3/4	AA-1324
1-3/16X1-7/16	1.1885	1.441	1-1/4	AA-1403-3
NOMINAL	1.1875	1.440	1-1/2	AA-1403-7
			2	AA-1403-10
	1.1905	1.4415	1-1/4	AA-1404-1
	1.1895	1.4405	1-1/2	AA-1404-2
			2	AA-1404-3
			2-1/2	AA-1404-4
			3	AA-1404-5
1-3/16X1-1/2	1.190	1.504	1	AA-1523-2
NOMINAL	1.189	1.503	1-1/2	AA-1523-5
			2	AA-1523
			2-1/2	AA-1523-3
	1.1905	1.504	1	AA-1525-1
	1.1895	1.503	1-1/4	AA-1525-2
			1-1/2	AA-1525-3
			1-3/4	AA-1525-4
			2	AA-1525-5
			2-1/2	AA-1525-6
			3	AA-1525-7
	1.193	1.504	1	AA-1504-6
	1.192	1.503	1-1/2	AA-1504-1
1-1/4X1-7/16	1.2515	1.4405	1-1/4	AA-1407-4
NOMINAL	1.2505	1.4395	1-1/2	AA-1407-5
			1-3/4	AA-1407
			2	AA-1407-6
			2-1/2	AA-1407-8
1-1/4X1-1/2	1.250	1.502	3/4	AA-1517-4
NOMINAL	1.249	1.501	1-1/4	AA-1517-6
			1-5/8	AA-1517-1
	1.252	1.502	1/2	AA-1512-12
	1.251	1.501	5/8	AA-1512-11
			3/4	AA-1512-14
			7/8	AA-1512-7
			1	AA-1512-15
			1-1/4	AA-1512-16

	ID	OD	LENGTH	PART NO.
1-1/4X1-1/2	1.252	1.502	1-3/8	AA-1512-3
NOMINAL	1.251	1.501	1-1/2	AA-1512-2
(CONT.)			1-3/4	AA-1512-17
			1-7/8	AA-1512-1
			2	AA-1512-5
			2-1/2	AA-1512-13
	1.252	1.502	5/8	AP-1512-11
	1.251	1.501	3/4	AP-1512-14
			1	AP-1512-15
			1-1/4	AP-1512-16
			1-1/2	AP-1512-2
	1.2535	1.504	1	AA-1528
	1.2525	1.503	1-1/4	AA-1528-3
			1-1/2	AA-1528-4
	1.254	1.504	1/2	AA-1524-1
	1.253	1.503	5/8	AA-1524-6
			3/4	AA-1524-2
			7/8	AA-1524-7
			1	AA-1524-3
			1-1/8	AA-1524-8
			1-1/4	AA-1524-4
			1-3/8	AA-1524-9
			1-1/2	AA-1524-5
			1-5/8	AA-1524-10
			1-3/4	AA-1524-11
			1-7/8	AA-1524-12
			2	AA-1524-13
			2-1/4	AA-1524-14
			2-1/2	AA-1524-15
			3	AA-1524-16
	1.258	1.504	1	AA-1505-11
	1.257	1.503	1-1/2	AA-1505-1
1-1/4X1-9/16	1.252	1.565	1-1/4	AA-1506-12
NOMINAL	1.251	1.5635	1-1/2	AA-1506-6
			1-3/4	AA-1506
			2	AA-1506-7
			2-1/4	AA-1506-8
1-1/4X1-5/8	1.250	1.627	1-1/2	AA-1602
NOMINAL	1.249	1.6255		
	1.252	1.6275	1	AA-1606-9
	1.251	1.626	1-1/4	AA-1606
			1-1/2	AA-1606-7
			1-5/8	AA-1606-11
			1-3/4	AA-1606-1
			2	AA-1606-3
			2-1/2	AA-1606-5
			3	AA-1606-4
	1.2535	1.630	1	AA-1607-1
	1.2525	1.6285	1-1/4	AA-1607-2
			1-1/2	AA-1607-3
			1-3/4	AA-1607-4
			2	AA-1607-5
			2-1/2	AA-1607-6
			3	AA-1607-7
	1.254	1.629	1-1/2	AA-1604
	1.253	1.6275	1-3/4	AA-1604-2
1-1/4X1-3/4	1.2535	1.755	1-3/4	AA-1716-1
NOMINAL	1.2525	1.7535	2	AA-1716-2
			2-1/2	AA-1716-3
			3	AA-1716-4
	1.254	1.753	1-1/2	AA-1715-6
	1.253	1.7515	2	AA-1715-2
			3	AA-1715-3

Note: The "AP" prefix indicates Oilite Plus. All sizes can be special ordered in Oilite Plus.



	ID	OD	LENGTH	PART NO.
1-5/16X1-1/2	1.3155	1.503	1	AA-1526-4
NOMINAL	1.3145	1.5015	1-1/4	AA-1526
			1-1/2	AA-1526-2
			2	AA-1526-3
1-5/16X1-5/8	1.3155	1.629	1-1/2	AA-1611-5
NOMINAL	1.3145	1.6275	2	AA-1611-2
			2-1/2	AA-1611
1-3/8X1-9/16	1.3745	1.5655	1-1/4	AA-1507-2
NOMINAL	1.3735	1.564	1-1/2	AA-1507
1-3/8X1-5/8	1.376	1.628	1	AA-1608-10
NOMINAL	1.375	1.6265	1-1/8	AA-1608-1
			1-1/4	AA-1608-11
			1-1/2	AA-1608-12
			1-3/4	AA-1608-13
			2	AA-1608
			2-1/2	AA-1608-3
	1.3785	1.630	1	AA-1610-1
	1.3775	1.6285	1-1/8	AA-1610-2
			1-1/4	AA-1610-3
			1-1/2	AA-1610-4
			2	AA-1610-5
			2-1/2	AA-1610-6
			3	AA-1610-7
	1.379	1.628	1-1/2	AA-1616-3
	1.378	1.6265	2	AA-1616-5
			2-1/2	AA-1616-7
1-3/8X1-3/4	1.3785	1.755	1	AA-1709-1
NOMINAL	1.3775	1.7535	1-1/2	AA-1709-2
			2	AA-1709-3
			2-1/2	AA-1709-4
			3	AA-1709-5
	1.380	1.753	1-1/2	AA-1708-5
	1.379	1.7515	2	AA-1708-2
			2-1/2	AA-1708
1-7/16X1-5/8	1.438	1.628	1	AA-1609-2
NOMINAL	1.437	1.6265	1-1/2	AA-1609-4
			2	AA-1609
			2-1/4	AA-1609-6
	1.441	1.630	1	AA-1603-1
	1.440	1.6285	1-1/2	AA-1603-2
			2	AA-1603-3
1-7/16X1-3/4	1.441	1.755	1	AA-1705-1
NOMINAL	1.440	1.7535	1-1/4	AA-1705-2
			1-1/2	AA-1705-3
			1-3/4	AA-1705-4
			2	AA-1705-5
			2-1/2	AA-1705-6
			3	AA-1705-7
	1.4425	1.7535	7/8	AA-1703-1
	1.4415	1.752	1	AA-1703-11
			1-1/8	AA-1703-14
			1-1/4	AA-1703-4
			1-1/2	AA-1703-6
			1-3/4	AA-1703-3
			1-7/8	AA-1703
			2	AA-1703-7
			2-1/4	AA-1703-10
			2-1/2	AA-1703-5
1-1/2X1-11/16	1.507	1.691	3/4	AA-1612-4
NOMINAL	1.506	1.6895	1	AA-1612-1

	ID	OD	LENGTH	PART NO.
1-1/2X1-3/4	1.503	1.754	1/2	AA-1704-20
NOMINAL	1.502	1.7525	5/8	AA-1704-21
			3/4	AA-1704-16
			7/8	AA-1704-4
			1	AA-1704-15
			1-1/8	AA-1704-17
			1-1/4	AA-1704-11
			1-3/8	AA-1704-5
			1-1/2	AA-1704
			1-3/4	AA-1704-3
			2	AA-1704-2
			2-1/4	AA-1704-7
			2-1/2	AA-1704-8
			3	AA-1704-9
			3-1/2	AA-1704-19
	1.503	1.754	3/4	AP-1704-16
	1.502	1.7525	1	AP-1704-15
			1-1/4	AP-1704-11
			1-1/2	AP-1704
	1.504	1.755	1/2	AA-1706-1
	1.503	1.7535	5/8	AA-1706-2
			3/4	AA-1706-3
			7/8	AA-1706-4
			1	AA-1706-5
			1-1/4	AA-1706-6
			1-3/8	AA-1706-7
			1-1/2	AA-1706-8
			1-3/4	AA-1706-9
			2	AA-1706-10
			2-1/4	AA-1706-11
			2-1/2	AA-1706-12
			3	AA-1706-13
1-1/2X1-13/16	1.502	1.815	1	AA-1801-1
NOMINAL	1.501	1.8135	1-5/8	AA-1801
1-1/2X1-7/8	1.503	1.878	1-1/2	AA-1807-9
NOMINAL	1.502	1.8765	1-3/4	AA-1807-10
			2	AA-1807
			2-1/2	AA-1807-11
			2-3/4	AA-1807-1
			3	AA-1807-2
	1.504	1.880	1-1/2	AA-1806-1
	1.503	1.879	2	AA-1806-2
			2-1/2	AA-1806-3
			3	AA-1806-4
	1.504	1.880	1-1/2	AA-1820-1
	1.503	1.8785	2	AA-1820-2
			2-1/2	AA-1820-3
			3	AA-1820-4
1-1/2X2	1.503	2.004	1	AA-2007-6
NOMINAL	1.502	2.0025	1-1/2	AA-2007-1
			2	AA-2007-2
			2-1/2	AA-2007-3
			3-1/2	AA-2007-5
	1.504	2.005	1	AA-2008-1
	1.503	2.0035	1-1/2	AA-2008-2
			2	AA-2008-3
			2-1/2	AA-2008-4
			3	AA-2008-5
			3-1/2	AA-2008-6
1-5/8X1-7/8	1.627	1.879	1	AA-1803-10
NOMINAL	1.6255	1.8775	1-1/4	AA-1803-11
			1-1/2	AA-1803-13
			1-3/4	AA-1803-14

	ID	OD	LENGTH	PART NO.
1-5/8X1-7/8	1.627	1.879	2	AA-1803-7
NOMINAL	1.6255	1.8775	2-1/4	AA-1803-1
(CONT.)			2-3/4	AA-1803-15
	1.629	1.880	1-1/4	AA-1804-1
	1.6275	1.8785	1-1/2	AA-1804-2
			1-3/4	AA-1804-3
			2	AA-1804-4
			2-1/4	AA-1804-5
1-5/8X2	1.6265	2.004	1-1/2	AA-2000-5
NOMINAL	1.625	2.0025	2	AA-2000-1
			2-1/2	AA-2000-3
			3	AA-2000-4
	1.629	2.005	1	AA-2003-1
	1.6275	2.0035	1-1/2	AA-2003-2
			2	AA-2003-3
			2-1/2	AA-2003-4
			3	AA-2003-5
1-11/16X2-3/16	1.6905	2.1915	2	AA-2107-1
NOMINAL	1.689	2.190		
	1.6915	2.1925	2	AA-2108-1
	1.690	2.191		
1-3/4X1-15/16	1.7525	1.9415	1-1/4	AA-1904-2
NOMINAL	1.751	1.940	1-1/2	AA-1904-3
1-3/4X2	1.753	2.004	1	AA-2001-11
NOMINAL	1.7515	2.0025	1-1/2	AA-2001-3
			1-7/8	AA-2001
			2	AA-2001-9
			2-1/2	AA-2001-1
			2-3/4	AA-2001-13
			3	AA-2001-2
	1.753	2.004	1	AP2001-11
	1.7515	2.0025	1-1/2	AP2001-3
	1.754	2.005	1	AA-2002-1
	1.7525	2.0035	1-1/4	AA-2002-2
			1-1/2	AA-2002-3
			1-3/4	AA-2002-4
			2	AA-2002-5
			2-1/2	AA-2002-6
			3	AA-2002-7
1-3/4X2-1/8	1.754	2.128	1/2	AA-2112-8
NOMINAL	1.7525	2.1265	1-1/2	AA-2112-1
			2	AA-2112-2
			2-1/2	AA-2112-3
	1.754	2.130	1-1/2	AA-2114-1
	1.7525	2.1285	2	AA-2114-2
			3	AA-2114-3
1-3/4X2-1/4	1.753	2.253	2	AA-2204-2
NOMINAL	1.7515	2.2515	2-1/2	AA-2204-3
			3	AA-2204
1-7/8X2-1/4	1.878	2.254	3/4	AA-2202-10
NOMINAL	1.8765	2.2525	2	AA-2202
			2-1/2	AA-2202-1
			3	AA-2202-2
1-15/16X2-1/8	1.940	2.1285	2	AA-2102-3
NOMINAL	1.9385	2.127	2-1/2	AA-2102-1
1-15/16X2-5/16	1.9405	2.3165	2	AA-2306-3
NOMINAL	1.939	2.315	3	AA-2306-5
	1.9415	2.3175	2	AA-2307-1
	1.940	2.316	2-1/2	AA-2307-2
			3	AA-2307-3
			4	AA-2307-4

Note: The "AP-" prefix indicates Oilite Plus. All sizes can be special ordered in Oilite Plus.



Oilite®/Oilite Plus®

SLEEVE BEARINGS

	ID	OD	LENGTH	PART NO.
1-15/16 X 2-7/16	1.942	2.4415	1-1/2	AA-2403-1
NOMINAL	1.9405	2.440	2	AA-2403-2
2 X 2-1/4	2.003	2.254	3/4	AA-2203-5
NOMINAL	2.0015	2.2525	1	AA-2203-6
			1-1/2	AA-2203-7
			2	AA-2203
			2-1/2	AA-2203-9
			3	AA-2203-10
	2.003	2.254	1	AP-2203-6
	2.0015	2.2525	1-1/2	AP-2203-7
			2	AP-2203
	2.004	2.255	1	AA-2213-1
	2.0025	2.2535	1-1/2	AA-2213-2
			2	AA-2213-3
			2-1/2	AA-2213-4
			3	AA-2213-5
2 X 2-3/8	2.003	2.379	1-1/8	AA-2304-6
NOMINAL	2.0015	2.3775	1-1/2	AA-2304-7
			1-3/4	AA-2304
			2	AA-2304-1
			2-1/2	AA-2304-2
			3	AA-2304-3
			4	AA-2304-5
2 X 2-1/2	2.003	2.503	1-1/2	AA-2501-1
NOMINAL	2.0015	2.501	2	AA-2501-2
			2-1/2	AA-2501-3
			3	AA-2501
	2.003	2.503	1-1/2	AP2501-1
	2.0015	2.501	2	AP2501-2
	2.004	2.505	1	AA-2502-1
	2.0025	2.5035	1-1/2	AA-2502-2
			2	AA-2502-3
			2-1/2	AA-2502-4
			3	AA-2502-5
2-3/16 X 2-3/8	2.190	2.379	1-1/2	AA-2303-1
NOMINAL	2.1885	2.3775		
2-1/4 X 2-5/8	2.254	2.6295	2	AA-2605-3
NOMINAL	2.2525	2.6275	3	AA-2605-5
			3-1/2	AA-2605
	2.254	2.631	2	AA-2606-1
	2.252	2.629	2-1/2	AA-2606-2
			3	AA-2606-3
2-1/4 X 2-3/4	2.253	2.753	1-1/2	AA-2703-1
NOMINAL	2.2515	2.751	2	AA-2703-2
			3	AA-2703
	2.254	2.756	2	AA-2707-1
	2.2525	2.754	3	AA-2707-2
2-3/8 X 2-5/8	2.377	2.6295	1-1/4	AA-2602-3
NOMINAL	2.3755	2.6275	1-5/8	AA-2602
2-3/8 X 2-3/4	2.379	2.753	2	AA-2701-2
NOMINAL	2.3775	2.751	2-1/2	AA-2701-6
			3	AA-2701
2-1/2 X 2-3/4	2.505	2.754	2	AA-2702-5
NOMINAL	2.5035	2.752	2-1/2	AA-2702-4
			3	AA-2702-1
	2.505	2.756	2	AA-2708-1
	2.5035	2.754	3	AA-2708-2
			4	AA-2708-3

	ID	OD	LENGTH	PART NO.
2-1/2 X 2-7/8	2.504	2.880	2-1/4	AA-2803-1
NOMINAL	2.5025	2.878	2-1/2	AA-2803-3
			3	AA-2803-2
	2.505	2.881	2-1/4	AA-2804-1
	2.5035	2.879	2-1/2	AA-2804-2
			3	AA-2804-3
2-1/2 X 3	2.504	3.005	2	AA-3005-7
NOMINAL	2.5025	3.003	2-1/2	AA-3005-4
			3	AA-3005-1
			4	AA-3005
	2.505	3.006	2	AA-3004-1
	2.5035	3.004	3	AA-3004-2
			4	AA-3004-3
2-3/4 X 3	2.753	3.005	1-1/2	AA-3006-1
NOMINAL	2.751	3.003	2-1/2	AA-3006
2-3/4 X 3-1/8	2.753	3.129	1-1/4	AA-3100-7
NOMINAL	2.751	3.127	2-3/4	AA-3100
2-3/4 X 3-1/4	2.752	3.254	1-1/2	AA-3201-1
NOMINAL	2.750	3.252	2	AA-3201-4
			3	AA-3201-7
	2.755	3.257	2	AA-4452-1
	2.753	3.255	3	AA-4452-2
			4	AA-4452-3
2-15/16 X 3-5/16	2.940	3.315	3	AA-3301-3
NOMINAL	2.938	3.313		
3 X 3-1/4	3.002	3.255	1-1/4	AA-3200-5
NOMINAL	3.000	3.253	2	AA-3200
			3	AA-3200-2
	3.006	3.257	2	AA-4852-1
	3.004	3.255	3	AA-4852-2
3 X 3-1/2	3.004	3.505	2-1/2	AA-3502-7
NOMINAL	3.002	3.503	3	AA-3502-8
	3.006	3.507	2	AA-4856-1
	3.004	3.505	2-1/2	AA-4856-2
			3	AA-4856-3
			4	AA-4856-4
3-1/4 X 3-5/8	3.253	3.628	4	AA-3600-05
NOMINAL	3.2510	3.6255		
3-1/2 X 4	3.5035	4.004	2	AA-4000-3
NOMINAL	3.5015	4.0015	3	AA-4000-5
			3-1/2	AA-4000-6
	3.507	4.008	3	AA-5664-1
	3.505	4.0055	3-1/2	AA-5664-2
			4	AA-5664-3
4 X 4-1/2	4.0035	4.504	4	AA-4500
NOMINAL	4.001	4.5015	6	AA-4500-2
	4.008	4.509	4	AA-6472-1
	4.0055	4.5065		
4 X 4-5/8	4.005	4.628	4	AA-4600-5
NOMINAL	4.003	4.6245		
4-1/2 X 5-1/4	4.504	5.2545	5	AA-5201
NOMINAL	4.5015	5.251		
5 X 5-3/4	5.004	5.755	2	AA-5700-1
NOMINAL	5.0005	5.751		

Note: The "AP-" prefix indicates Oilite Plus. All sizes can be special ordered in Oilite Plus.



	ID	OD	LENGTH	FLANGE OD	FLANGE THICKNESS	PART NO.
1/8X1/4	.126	.252	1/4	5/16	1/16	FF-207-2
NOMINAL	.125	.251	3/8			FF-207-3
3/16X5/16	.187	.313	1/4	3/8	1/16	FF-313-1
NOMINAL	.186	.312	3/8			FF-313-2
	.1895	.314	3/16	7/16	1/16	FF-303-1
	.1885	.313	1/4			FF-303-3
			5/16			FF-303-2
			3/8			FF-303
			1/2			FF-303-4
	.1895	.3155	3/16	7/16	1/16	FF-314-1
	.1885	.3145	1/4			FF-314-2
			5/16			FF-314-3
			3/8			FF-314-4
			1/2			FF-314-5
3/16X3/8	.1895	.3765	3/8	7/16	1-16	FF-307
NOMINAL	.1885	.3755	1/2			FF-307-2
1/4X3/8	.250	.381	3/16	1/2	1/16	FF-310
NOMINAL	.249	.380	1/4			FF-310-3
			5/16			FF-310-4
			3/8			FF-310-1
			7/16			FF-310-5
			1/2			FF-310-2
			9/16			FF-310-7
			11/16			FF-310-10
	.252	.377	1/4	1/2	3/64	FF-311-1
	.251	.376	3/8			FF-311-2
			1/2			FF-311-3
	.252	.3775	3/8	15/32	3/64	FF-300
	.251	.3765				
	.252	.3775	3/16	15/32	1/16	FF-312-3
	.251	.3765	1/4			FF-312
			5/16			FF-312-4
			3/8			FF-312-1
			7/16			FF-312-5
			1/2			FF-312-2
			5/8			FF-312-6
	.252	.3775	1/4	15/32	1/16	FP-312
	.251	.3765	3/8			FP-312-1
			1/2			FP-312-2
	.252	.378	3/16	1/2	1/16	FF-317
	.251	.377	1/4			FF-317-1
			3/8			FF-317-2
			7/16			FF-317-6
			1/2			FF-317-3
			5/8			FF-317-5
			3/4			FF-317-4
	.253	.377	3/8	1/2	1/16	FF-375
	.252	.376	1/2			FF-375-1
1/4X7/16	.251	.4395	1/2	1/2	1/16	FF-435-1
NOMINAL	.250	.4385				
1/4X1/2	.252	.503	5/8	5/8	1/16	FF-565-2
NOMINAL	.251	.502	3/4			FF-565-3
5/16X7/16	.3125	.440	3/8	9/16	1/16	FF-411-1
NOMINAL	.3115	.439	1/2			FF-411-2
			7/8			FF-411-4
	.3145	.4405	3/8	9/16	1/16	FF-413-1
	.3135	.4395	1/2			FF-413-2
			3/4			FF-413-3
5/16X1/2	.3135	.502	3/8	9/16	1/16	FF-501-2
NOMINAL	.3125	.501				

	ID	OD	LENGTH	FLANGE OD	FLANGE THICKNESS	PART NO.
3/8X1/2	.3765	.502	1/4	5/8	1/16	FF-520-15
NOMINAL	.3755	.501	5/16			FF-520-9
			3/8			FF-520-10
			1/2			FF-520-5
	.3765	.502	1/4	5/8	1/16	FP-520-15
	.3755	.501	3/8			FP-520-10
			1/2			FP-520-5
	.3765	.503	1/2	5/8	3/32	FF-512-2
	.3755	.502	5/8			FF-512-3
	.377	.502	3/8	11/16	3/32	FF-511-1
	.376	.501	1/2			FF-511-2
			5/8			FF-511-3
	.377	.503	1/4	11/16	1/16	FF-318-1
	.376	.502	3/8			FF-318-5
			1/2			FF-318-2
			3/4			FF-318-3
			1			FF-318-4
	.378	.503	1/2	3/4	3/32	FF-519-2
	.377	.502				
3/8X9/16	.376	.564	1/2	.740	1/16	FF-503-6
NOMINAL	.375	.563	11/16			FF-503-4
			13/16			FF-503
	.377	.5655	1/2	11/16	1/16	FF-320-1
	.376	.5645	3/4			FF-320-2
3/8X5/8	.376	.627	1/2	7/8	1/16	FF-607-2
NOMINAL	.375	.625	3/4			FF-607-3
			1-1/4			FF-607-1
	.377	.628	1/2	7/8	1/16	FF-319-1
	.376	.627	3/4			FF-319-2
			1			FF-319-3
			1-1/4			FF-319-4
7/16X9/16	.439	.565	1/2	11/16	1/16	FF-504-3
NOMINAL	.438	.564	5/8			FF-504
			3/4			FF-504-1
	.4395	.5655	1/2	11/16	1/16	FF-505-1
	.4385	.5645	3/4			FF-505-2
7/16X5/8	.4385	.627	3/4	7/8	1/8	FF-608-3
NOMINAL	.4375	.626	1-1/4			FF-608
	.4395	.628	3/4	7/8	1/8	FF-619-1
	.4385	.627	1-1/4			FF-619-2
1/2X5/8	.502	.627	1/2	31/32	3/32	FF-600-5
NOMINAL	.501	.626	1			FF-600-2
			1-3/4			FF-600
	.502	.627	3/16	7/8	1/16	FF-620-9
	.501	.626	1/4			FF-620-13
			3/8			FF-620-8
			1/2			FF-620-1
			9/16			FF-620-5
			5/8			FF-620-7
			1			FF-620-3
			1-1/8			FF-620-4
	.502	.627	1/4	7/8	1/16	FP-620-13
	.501	.626	3/8			FP-620-8
			1/2			FP-620-1
			9/16			FP-620-5
			5/8			FP-620-7
	.502	.627	5/16	3/4	3/32	FF-636-3
	.501	.626	3/8			FF-636-2

Note: The "FP-" prefix indicates Oilite Plus. All sizes can be special ordered in Oilite Plus.



Oilite®/Oilite Plus®

FLANGE BEARINGS

	ID	OD	LENGTH	FLANGE OD	FLANGE THICKNESS	PART NO.
1/2X5/8 NOMINAL (CONT.)	.502	.628	5/16	7/8	1/8	FF-611-9
	.501	.627	3/8			FF-611-1
			1/2			FF-611-2
			5/8			FF-611-3
			3/4			FF-611-4
			7/8			FF-611-5
			1			FF-611-6
			1-1/4			FF-611-7
			1-1/2			FF-611-8
1/2X11/16 NOMINAL	.502	.6905	5/16	7/8	1/8	FF-623-1
	.501	.6895	1/2			FF-623-2
			3/4			FF-623-3
	.502	.691	1/2	31/32	3/32	FF-604-2
	.501	.690	3/4			FF-604-1
			13/16			FF-604
	.502	.691	5/16	13/16	1/16	FF-609-1
	.501	.690	1/2			FF-609-3
			3/4			FF-609-4
		13/16			FF-609	
1/2X3/4 NOMINAL	.502	.753	1/2	1	1/8	FF-621-1
	.501	.752	5/8			FF-621-2
			3/4			FF-621-3
			1			FF-621-4
			1-1/4			FF-621-5
	.502	.753	1/2	15/16	1/8	FF-707-5
	.501	.752	3/4			FF-707-2
			1			FF-707-3
	.503	.753	3/4	15/16	1/8	FF-710
	.502	.752				
	.505	.753	3/8	1	1/8	FF-723-5
	.504	.752	1/2			FF-723-1
		5/8			FF-723	
5/8X3/4 NOMINAL	.626	.753	1/2	1	1/8	FF-711-1
	.625	.752	5/8			FF-711-2
			3/4			FF-711-3
			1			FF-711-4
	.6265	.7525	1/2	1	3/32	FF-703-2
	.6255	.7515	5/8			FF-703-3
			3/4			FF-703-7
			1			FF-703-1
			1-1/8			FF-703
			1-1/4			FF-703-6
	.6275	.7525	1/2	7/8	1/16	FF-718-1
	.6265	.7515	1			FF-718-3
		1-1/8			FF-718-6	
5/8X13/16 NOMINAL	.625	.815	1	1	1/8	FF-823-3
	.624	.814	1-1/4			FF-823
	.626	.815	1/2	1	1/8	FF-842-1
	.625	.814	3/4			FF-842-2
			1			FF-842-3
	.627	.8165	3/4	1	1/8	FF-844-1
	.626	.8155	1			FF-844-2
			1-1/4			FF-844-3
			1-1/2			FF-844-4
	.628	.816	3/4	1-1/4	1/8	FF-806-1
	.627	.815	1-7/16			FF-806
	.6295	.8155	1/2	1	1/8	FF-805-2
.6285	.8145	3/4			FF-805	
		1			FF-805-3	

	ID	OD	LENGTH	FLANGE OD	FLANGE THICKNESS	PART NO.
5/8X7/8 NOMINAL	.627	.877	5/8	1	1/8	FF-843-4
	.626	.876	3/4			FF-843
			1			FF-843-2
			1-1/4			FF-843-3
	.627	.879	1/2	1-1/8	1/8	FF-852-1
5/8X1 NOMINAL	.626	.878	5/8			FF-852-2
			3/4			FF-852-3
			1			FF-852-4
			1-1/4			FF-852-5
	.627	.879	1/2	1-1/8	1/8	FF-855-1
3/4X7/8 NOMINAL	.751	.877	1/2	1	1/16	FF-838-1
	.750	.876	1			FF-838-3
	.752	.879	1/2	1-1/8	1/8	FF-854-1
	.751	.878	3/4			FF-854-2
3/4X15/16 NOMINAL	.7505	.941	3/4	1-1/8	3/32	FF-911-3
	.7495	.940	1			FF-911-4
	.752	.9415	3/4	1-1/4	1/8	FF-1115-1
	.751	.9405	1			FF-1115-2
			1-1/8			FF-1115-3
			1-1/4			FF-1115-4
	.753	.938	9/16			FF-901-4
	.752	.937	3/4	1-5/16	1/8	FF-901-6
			1-1/4			FF-901-8
			1-9/16			FF-901
	.753	.9405	1-1/8	1.175	1/8	FF-905
	.752	.9395				
3/4X1 NOMINAL	.7505	1.002	1/2	1-7/16	1/8	FF-1011-2
	.7495	1.001	5/8			FF-1011
			1			FF-1011-4
			1-1/8			FF-1011-1
	.751	1.002	3/4	1-1/2	1/8	FF-1013-2
	.750	1.001	1			FF-1013
			1-1/4			FF-1013-3
			1-1/2			FF-1013-4
	.751	1.002	3/4	1-1/2	1/8	FP-1013-2
	.750	1.001	1			FP-1013
			1-1/4			FP-1013-3
	.752	1.002	3/4	1-5/16	1/8	FF-1014-2
.751	1.001	1			FF-1014	
.752	1.003	5/8	1-1/4	5/32	FF-1012-1	
.751	1.002	3/4			FF-1012-2	
		1			FF-1012-3	
		1-1/4			FF-1012-4	
.752	1.004	5/8	1-1/4	3/16	FF-1016-1	
.751	1.003	3/4			FF-1016-2	
		1			FF-1016-3	
		1-1/8			FF-1016-6	
		1-1/4			FF-1016-4	
		1-1/2			FF-1016-5	
.753	1.003	1/2	1-1/8	1/8	FF-1015-1	
.752	1.002	5/8			FF-1015-4	
		3/4			FF-1015-2	
		1			FF-1015	
		1-1/2			FF-1015-3	
3/4X1-1/16 NOMINAL	.752	1.0655	1-3/16	1-3/16	1/8	FF-1010
	.751	1.0645				
7/8X1 NOMINAL	.8765	1.003	5/8	1-1/4	1/8	FF-1001-2
	.8755	1.002	3/4			FF-1001-1
			1			FF-1001

Note: The "FP-" prefix indicates Oilite Plus. All sizes can be special ordered in Oilite Plus.



Oilite®/Oilite Plus®

FLANGE BEARINGS

	ID	OD	LENGTH	FLANGE OD	FLANGE THICKNESS	PART NO.
7/8X1	.877	1.004	1/2	1-1/4	3/16	FF-1017-1
NOMINAL	.876	1.003	3/4			FF-1017-2
(CONT.)			1			FF-1017-3
7/8X1-1/8	.877	1.128	5/8	1-1/2	1/8	FF-1102-6
NOMINAL	.876	1.127	1			FF-1102-2
			1-1/4			FF-1102-3
			1-3/4			FF-1102
	.877	1.129	3/4	1-1/2	1/8	FF-1018-1
	.876	1.128	1			FF-1018-2
			1-1/4			FF-1018-3
			1-1/2			FF-1018-4
			1-3/4			FF-1018-5
1X1-1/4	1.001	1.252	3/4	1-1/2	1/8	FF-1213-1
NOMINAL	1.000	1.251	1-1/2			FF-1213-4
	1.001	1.253	3/4	1-7/8	1/8	FF-1202-4
	1.000	1.252	1			FF-1202-3
			1-1/4			FF-1202
	1.002	1.252	3/4	1-5/8	1/8	FF-1207-5
	1.001	1.251	1-1/4			FF-1207-7
			1-1/2			FF-1207-3
			1-3/4			FF-1207
	1.002	1.252	3/4	1-5/8	1/8	FP-1207-5
	1.001	1.251	1-1/4			FP-1207-7
			1-1/2			FP-1207-3
	1.002	1.253	3/4	1-1/2	3/16	FF-1211-1
	1.001	1.252	1			FF-1211-2
			1-1/4			FF-1211-3
	1.003	1.254	3/4	1-1/2	1/8	FF-1214-1
	1.002	1.253	1			FF-1214-2
			1-1/4			FF-1214-3
			1-1/2			FF-1214-4
1X1-5/16	1.001	1.316	1-1/4	1-3/4	7/32	FF-1302
NOMINAL	1.000	1.315	1-1/2			FF-1302-3
	1.0015	1.3155	1-1/2	1-7/8	1/8	FF-1301
	1.0005	1.3145				
1X1-3/8	1.000	1.3785	1-3/4	1-3/4	3/16	FF-1304
NOMINAL	.999	1.3775	2			FF-1304-1
	1.003	1.379	3/4	1-5/8	3/16	FF-1305-1
	1.002	1.378	1			FF-1305-2
			1-1/2			FF-1305-3
			1-3/4			FF-1305-4
			2			FF-1305-6
1-1/8X1-3/8	1.127	1.377	3/4	1-3/4	1/8	FF-1314-1
NOMINAL	1.126	1.376	1			FF-1314-2
			1-1/4			FF-1314-3
1-1/4X1-1/2	1.2515	1.503	1/2	1-11/16	1/8	FF-1505-5
NOMINAL	1.2505	1.502	3/4			FF-1505-6
			1-1/4			FF-1505
	1.252	1.503	1-1/2	2	3/32	FF-1506-4
	1.251	1.502	1-3/4			FF-1506-5
	1.2535	1.504	1	1-3/4	3/16	FF-1507-1
	1.2525	1.503	1-1/4			FF-1507-2
			1-1/2			FF-1507-3
			1-3/4			FF-1507-4
1-3/8X1-5/8	1.377	1.628	3/4	2	1/8	FF-1618
NOMINAL	1.376	1.6265	1			FF-1618-1
1-1/2X1-3/4	1.503	1.752	3/4	2	3/32	FF-1704-1
NOMINAL	1.502	1.7505	1			FF-1704-2
			1-1/2			FF-1704-4
	1.504	1.755	1-1/2	2	3/16	FF-1705-1
	1.503	1.7535				

	ID	OD	LENGTH	FLANGE OD	FLANGE THICKNESS	PART NO.
1-5/8X2	1.6265	2.004	2	2-1/4	3/16	FF-2000
NOMINAL	1.625	2.0025				
	1.629	2.005	2	2-1/4	3/16	FF-2002-1
	1.6275	2.0035				
1-3/4X2-1/4	1.753	2.254	2-1/2	3	1/4	FF-2204-3
NOMINAL	1.7515	2.253				
	1.754	2.255	2-1/2	3	1/4	FF-2005-1
	1.753	2.254				
2X2-1/4	2.003	2.254	3/4	2-1/2	1/8	FF-2203-2
NOMINAL	2.0015	2.2535	1			FF-2203-3
			1-1/4			FF-2203-4
	2.004	2.255	2	2-1/2	1/8	FF-2206-1
	2.0025	2.2535				
2X2-1/2	2.002	2.501	2-3/8	3	3/8	FF-2501
NOMINAL	2.0005	2.4995				
2-3/4X3-1/4	2.752	3.250	1-1/2	4	3/16	FF-3200-4
NOMINAL	2.750	3.248				
3X3-1/2	3.002	3.502	2-3/8	4	3/8	FF-3500
NOMINAL	3.000	3.500				

Note: The "FP-" prefix indicates Oilite Plus. All sizes can be special ordered in Oilite Plus.



Oilite®/Oilite Plus®
THRUST BEARINGS

	ID	OD	THICKNESS	PART NO.
1/4X7/16 NOMINAL	.260	.4475	1/16	TT-400
	.250	.4275		
	.260	.4675	1/16	TP-400
	.250	.4475		
1/4X1/2 NOMINAL	.260	.510	1/16	TT-504
	.250	.490		
	.260	.510	1/16	TP-504
	.250	.490		
1/4X5/8 NOMINAL	.260	.635	1/16	TT-601
	.250	.615		
	.260	.635	1/16	TP-601
	.250	.615		
5/16X5/8 NOMINAL	.3195	.635	1/16	TT-602
	.3095	.615		
	.3195	.635	1/16	TP-602
	.3095	.615		
5/16X3/4 NOMINAL	.320	.760	1/16	TT-709-1
	.310	.740		
	.320	.760	1/16	TP-709-1
	.310	.740		
3/8X5/8 NOMINAL	.390	.635	1/16	TT-604
	.380	.615		
	.390	.635	1/16	TP-604
	.380	.615		
3/8X3/4 NOMINAL	.3825	.760	1/16	TT-710-1
	.3725	.740	1/8	TT-710-2
	.3825	.760	1/16	TP-710-1
	.3725	.740	1/8	TP-710-2
	.395	.760	1/32	TT-703
	.385	.740		
	.395	.760	1/32	TP-703
	.385	.740		
7/16X3/4 NOMINAL	.4435	.760	1/16	TT-705-1
	.4335	.740		
	.4435	.760	1/16	TP-705-1
	.4335	.740		
1/2X3/4 NOMINAL	.512	.760	1/16	TT-706
	.502	.740		
	.512	.760	1/16	TP-706
	.502	.740		
1/2X7/8 NOMINAL	.510	.885	3/16	TT-801
	.500	.865		
	.510	.885	3/16	TP-801
	.500	.865		
1/2X1 NOMINAL	.515	1.010	1/16	TT-1001
	.505	.990	3/32	TT-1001-2
			1/8	TT-1001-1
	.515	1.010	1/16	TP-1001
	.505	.990	3/32	TP-1001-2
			1/8	TP-1001-1
9/16X1-1/4 NOMINAL	.570	1.260	1/16	TT-1200-1
	.560	1.240	1/8	TT-1200
	.570	1.260	1/16	TP-1200-1
	.560	1.240	1/8	TP-1200
5/8X1 NOMINAL	.633	1.010	1/16	TT-1002-1
	.623	.990	1/8	TT-1002
	.633	1.010	1/16	TP-1002-1
	.623	.990	1/8	TP-1002

	ID	OD	THICKNESS	PART NO.
5/8X1-3/16 NOMINAL	.632	1.1975	1/16	TT-1102-1
	.622	1.1775	3/32	TT-1102
			1/8	TT-1102-2
	.632	1.1975	1/16	TP-1102-1
	.622	1.1775	3/32	TP-1102
			1/8	TP-1102-2
5/8X1-1/4 NOMINAL	.633	1.260	1/16	TT-1204
	.623	1.240	1/8	TT-1204-1
	.633	1.260	1/16	TP-1204
	.623	1.240	1/8	TP-1204-1
5/8X1-1/2 NOMINAL	.661	1.510	1/16	TT-1508-1
	.651	1.490	1/8	TT-1508-2
	.661	1.510	1/16	TP-1508-1
	.651	1.490	1/8	TP-1508-2
3/4X1-1/4 NOMINAL	.758	1.260	1/16	TT-1205
	.748	1.240	1/8	TT-1205-1
	.758	1.260	1/16	TP-1205
	.748	1.240	1/8	TP-1205-1
3/4X1-3/8 NOMINAL	.758	1.385	1/16	TT-1303-1
	.748	1.365	1/8	TT-1303-2
			1/4	TT-1303-4
	.758	1.385	1/16	TP-1303-1
	.748	1.365	1/8	TP-1303-2
			1/4	TP-1303-4
3/4X1-9/16 NOMINAL	.770	1.5775	3/32	TT-1501-1
	.760	1.5475		
	.770	1.5775	3/32	TP-1501-1
	.760	1.5475		
3/4X1-3/4 NOMINAL	.770	1.765	1/8	TT-1701
	.760	1.735		
	.770	1.765	1/8	TP-1701
	.760	1.735		
7/8X1-1/2 NOMINAL	.8955	1.515	1/16	TT-1503-2
	.8855	1.485	1/8	TT-1503
	.8955	1.515	1/16	TP-1503-2
	.8855	1.485	1/8	TP-1503
7/8X2 NOMINAL	.885	2.015	1/8	TT-2007
	.875	1.985		
	.885	2.015	1/8	TP-2007
	.875	1.985		
7/8X2-1/8 NOMINAL	.8955	2.140	1/8	TT-2101-1
	.8855	2.110		
	.8955	2.140	1/8	TP-2101-1
	.8855	2.110		
1X1-1/2 NOMINAL	1.008	1.519	1/16	TT-1502-2
	.998	1.489	1/8	TT-1502
			3/16	TT-1502-1
	1.008	1.519	1/16	TP-1502-2
	.998	1.489	1/8	TP-1502
			3/16	TP-1502-1
1X1-5/8 NOMINAL	1.0205	1.640	1/16	TT-1603-3
	1.0105	1.610	1/8	TT-1603
			1/4	TT-1603-4
	1.0205	1.640	1/16	TP-1603-3
	1.0105	1.610	1/8	TP-1603
			1/4	TP-1603-4

Note: The "TP-" prefix indicates Oilite Plus.



Oilite®/Oilite Plus®

THRUST BEARINGS

	ID	OD	THICKNESS	PART NO.
1X1-3/4 NOMINAL	1.017	1.765	1/16	TT-1709-1
	1.007	1.735	1/8	TT-1709
	1.017	1.765	1/16	TP-1709-1
	1.007	1.735	1/8	TP-1709
1X2 NOMINAL	1.021	2.015	1/8	TT-2001
	1.011	1.985	3/16	TT-2001-1
	1.021	2.015	1/8	TP-2001
	1.011	1.985	3/16	TP-2001-1
1X2-7/8 NOMINAL	1.0205	2.890	1/8	TT-2800
	1.0105	2.860		
	1.0205	2.890	1/8	TP-2800
	1.0105	2.860		
1-1/16X2-3/8 NOMINAL	1.0675	2.390	1/16	TT-2301-4
	1.0575	2.360	1/8	TT-2301-3
	1.0675	2.390	1/16	TP-2301-4
	1.0575	2.360	1/8	TP-2301-3
1-1/8X1-7/8 NOMINAL	1.145	1.890	1/8	TT-1800-1
	1.135	1.860		
	1.145	1.890	1/8	TP-1800-1
	1.135	1.860		
1-1/4X1-11/16 NOMINAL	1.258	1.705	1/8	TT-1602
	1.248	1.675		
	1.258	1.705	1/8	TP-1602
	1.248	1.675		
1-1/4X2 NOMINAL	1.270	2.015	1/16	TT-2006
	1.260	1.985	1/8	TT-2006-1
	1.270	2.015	1/16	TP-2006
	1.260	1.985	1/8	TP-2006-1
1-1/4X2-3/8 NOMINAL	1.270	2.390	1/16	TT-2304-1
	1.260	2.360	1/8	TT-2304-2
	1.270	2.390	1/16	TP-2304-1
	1.260	2.360	1/8	TP-2304-2
1-1/4X3-5/16 NOMINAL	1.260	3.332	1/16	TT-3301
	1.250	3.292	1/8	TT-3301-1
	1.260	3.332	1/16	TP-3301
	1.250	3.292	1/8	TP-3301-1
1-3/8X1-15/16 NOMINAL	1.389	1.955	1/8	TT-1900
	1.369	1.925		
	1.389	1.955	1/8	TP-1900
	1.369	1.925		
1-1/2X2 NOMINAL	1.513	2.015	1/8	TT-2008
	1.493	1.985		
	1.513	2.015	1/8	TP-2008
	1.493	1.985		
1-1/2X2-1/2 NOMINAL	1.514	2.520	1/8	TT-2005
	1.504	2.490		
	1.514	2.520	1/8	TP-2005
	1.504	2.490		
1-1/2X3-1/2 NOMINAL	1.520	3.520	3/16	TT-3500-1
	1.500	3.480		
	1.520	3.520	3/16	TP-3500-1
	1.500	3.480		
1-9/16X2-7/16 NOMINAL	1.588	2.4525	1/8	TT-2402
	1.568	2.4225		
	1.588	2.4525	1/8	TP-2402
	1.568	2.4225		

	ID	OD	THICKNESS	PART NO.
1-3/4X2-7/16 NOMINAL	1.765	2.455	1/8	TT-2400-1
	1.745	2.425		
	1.765	2.455	1/8	TP-2400-1
	1.745	2.425		
1-3/4X2-5/8 NOMINAL	1.775	2.640	1/8	TT-2601
	1.755	2.610		
	1.775	2.640	1/8	TP-2601
	1.755	2.610		
1-15/16X2-5/8 NOMINAL	1.963	2.640	1/8	TT-2600
	1.943	2.610		
	1.963	2.640	1/8	TP-2600
	1.943	2.610		
2X3 NOMINAL	2.021	3.015	1/8	TT-3001-3
	2.001	2.985	3/16	TT-3001
			1/4	TT-3001-1
	2.021	3.015	1/8	TP-3001-3
	2.001	2.985	3/16	TP-3001
		1/4	TP-3001-1	
2X3-5/8 NOMINAL	2.041	3.645	3/16	TT-3600
	2.021	3.605		
	2.041	3.645	3/16	TP-3600
	2.021	3.605		
2X4 NOMINAL	2.072	4.020	1/8	TT-4002-1
	2.052	3.980	1/4	TT-4002
	2.072	4.020	1/8	TP-4002-1
	2.052	3.980	1/4	TP-4002
2-1/2X3-1/4 NOMINAL	2.512	3.270	1/8	TT-3200
	2.492	3.230		
	2.512	3.270	1/8	TP-3200
	2.492	3.230		
2-3/4X3-7/8 NOMINAL	2.781	3.895	1/4	TT-3800
	2.751	3.855		
	2.781	3.895	1/4	TP-3800
	2.751	3.855		

Note: The "TP-" prefix indicates Oilite Plus.



CORED BAR STOCK

6-1/2" LENGTHS
Will finish to dimensions shown.

ID	OD	PART NO.
1/2	1	CC-1000-2
	1-1/8	CC-1103
	1-1/4	CC-1203
	1-1/2	CC-1502
	2	CC-2005
5/8	1	CC-1001
	1-1/8	CC-1101-1
	1-1/4	CC-1200-1
	1-3/8	CC-1302
	1-1/2	CC-1503
	1-3/4	CC-1703
	2	CC-2006
3/4	1-1/4	CC-1201-1
	1-1/2	CC-1500-1
	1-3/4	CC-1702
	2	CC-2001
	2-1/4	CC-2206
	2-1/2	CC-2504
	2-3/4	CC-2704
7/8	1-3/8	CC-1301
	1-1/2	CC-1504
	2	CC-2007
	2-1/4	CC-2207
1	1-1/2	CC-1501
	1-5/8	CC-1600-1
	1-3/4	CC-1700-2
	2	CC-2002
	2-1/4	CC-2202-2
	2-1/2	CC-2501
	3	CC-3001
	3-1/2	CC-3504
	4	CC-4004
	1-1/8	2-1/8
1-1/4	1-3/4	CC-1701-3
	2	CC-2000-1
	2-1/4	CC-2203
	2-1/2	CC-2502
	3	CC-3003
1-3/8	2	CC-2003
	2-3/4	CC-2702
	2	CC-2004
	2-1/4	CC-2200-1
1-1/2	2-1/2	CC-2503
	2-3/4	CC-2701
	3	CC-3002
	3-1/2	CC-3502
	4	CC-4007
	2-1/4	CC-2201-3
	2-1/2	CC-2500-1
	2-5/8	CC-2604
2-3/4	CC-2703	
1-3/4	3	CC-3005
	3-1/2	CC-3503
	4-1/4	CC-4202
	4-1/2	CC-4502

ID	OD	PART NO.
2	2-3/4	CC-2700-1
	3	CC-3000
	3-1/4	CC-3201-2
	4	CC-4003
	4-1/2	CC-4501
2-1/4	3	CC-3006
	3-1/4	CC-3202-1
	3-1/2	CC-3500-1
	3-3/4	CC-3703
	4	CC-4008
2-3/8	3	CC-3007
	3-1/2	CC-3507
	4	CC-4009
	4-1/2	CC-4504
2-1/2	3-1/2	CC-3501
	3-3/4	CC-3702
	4	CC-4010
	4-1/4	CC-4203
	4-1/2	CC-4505
2-3/4	3-3/4	CC-3700-1
	3	CC-3701-1
	4	CC-4001
	4-1/2	CC-4506
	5	CC-5002
3	6	CC-6000
	9	CC-9001
	3-1/4	CC-4200-1
	3-1/2	CC-4700-2
3-1/2	4-3/4	CC-5003
	5	CC-6002
	6	CC-6002
3-3/4	5	CC-5004
	5-1/2	CC-5501
4	6	CC-6001
	7	CC-7001
	8	CC-8000
	4-1/2	6
5	7	CC-7000
6	8	CC-8001

Specifications subject to change without notice

SOLID BAR STOCK

6-1/2" LENGTHS
Will finish to dimensions shown.

DIAMETER	PART NO.
1/4	*BB-200
3/8	**BB-302
1/2	BB-500
5/8	BB-600-1
3/4	BB-700-1
7/8	BB-800-1
1	BB-1000-2
1-1/8	BB-1100
1-1/4	BB-1200-1
1-3/8	BB-1300
1-1/2	BB-1500-2
1-5/8	BB-1600
1-3/4	BB-1700-1
2	BB-2000-1
2-1/4	BB-2200
2-1/2	BB-2500-1
2-3/4	BB-2700-1
3	BB-3000-1
3-1/4	BB-3200-2
3-1/2	BB-3500-1
4	BB-4000-1
4-1/2	BB-4500
5	BB-5000
5-1/2	BB-5500
6	BB-6000
7	BB-7000
8	BB-8000

* LENGTH - 2"
** LENGTH - 3"

PLATE STOCK

WIDTH AND LENGTH —
Will finish to dimensions shown.

WIDTH	LENGTH	*THICKNESS	PART NO.
1/2	2-1/2	1/4	PP-2500
1-1/8	3-1/8	3/16	PP-3100
2	8-1/8	1/4	PP-8100-1
		1/2	PP-8100
3	12	1/4	PP-12100
		1/2	PP-12100-1
		3/4	PP-12100-2
5	6	1	PP-12100-3
		1/8	PP-6000
		3/16	PP-6000-1
5	8	1/4	PP-6000-2
		3/8	PP-6000-4
		1/2	PP-6000-5
		5/8	PP-6000-6
		3/4	PP-6000-7
		1	PP-6000-8
		1/8	PP-8000-7
3/16	PP-8000		
6	12	1/4	PP-8000-1
		1/2	PP-8000-4
		3/4	PP-8000-5
		1	PP-8000-6
		1/8	PP-12000-6
6	12	3/16	PP-12000-7
		1/4	PP-12000
		3/8	PP-12000-1
		1/2	PP-12000-2
		5/8	PP-12000-3
		3/4	PP-12000-4
1	PP-12000-5		

* THICKNESS - +0.010/-0.005"

CIRCULAR BEARING PLATES-DISCS

OILITE BRONZE
ID and OD will finish to dimensions shown.

ID	OD	THICKNESS ±.0025"	PART NO.
1	3	1/4	CD-3001
	4	1/4	CD-4001
2	4	1/4	CD-4002
	5-1/2	1/4*	CD-5500
2.25	4-1/2	1/4	CD-4502
4	6	5/16*	CD-6003
SOLID	3	1/4	DD-3000
	3	3/8	DD-3000-1
	4	1/4	DD-4000
	5-5/8	1/4*	DD-5602-1

* THICKNESS ±.0035"

Oilite® M Series®

METRIC SLEEVE BEARINGS



	ID (mm)	OD (mm)	LENGTH (mm)	PART NO.
3X6	3.020	6.040	4	AAM0306-04
NOMINAL	3.000	6.020	6	AAM0306-06
			10	AAM0306-10
4X7	4.020	7.040	4	AAM0407-04
NOMINAL	4.000	7.020	8	AAM0407-08
4X8	4.020	8.040	3	AAM0408-03
NOMINAL	4.000	8.020	4	AAM0408-04
			6	AAM0408-06
			8	AAM0408-08
5X8	5.020	8.040	4	AAM0508-04
NOMINAL	5.000	8.020	5	AAM0508-05
			8	AAM0508-08
			10	AAM0508-10
			16	AAM0508-16
6X9	6.020	9.040	4	AAM0609-04
NOMINAL	6.000	9.020	6	AAM0609-06
			8	AAM0609-08
			10	AAM0609-10
			12	AAM0609-12
			16	AAM0609-16
6X10	6.020	10.040	4	AAM0610-04
NOMINAL	6.000	10.020	6	AAM0610-06
			10	AAM0610-10
			12	AAM0610-12
			16	AAM0610-16
6X12	6.020	12.050	6	AAM0612-06
NOMINAL	6.000	12.030	10	AAM0612-10
			12	AAM0612-12
8X11	8.030	11.050	6	AAM0811-06
NOMINAL	8.010	11.030	8	AAM0811-08
			12	AAM0811-12
8X12	8.030	12.050	6	AAM0812-06
NOMINAL	8.010	12.030	8	AAM0812-08
			12	AAM0812-12
			16	AAM0812-16
			20	AAM0812-20
8X14	8.030	14.050	8	AAM0814-08
NOMINAL	8.010	14.030	12	AAM0814-12
			16	AAM0814-16
			20	AAM0814-20
10X13	10.030	13.050	10	AAM1013-10
NOMINAL	10.010	13.030	16	AAM1013-16
10X14	10.030	14.050	8	AAM1014-08
NOMINAL	10.010	14.030	10	AAM1014-10
			14	AAM1014-14
			16	AAM1014-16
			25	AAM1014-25
10X16	10.030	16.050	10	AAM1016-10
NOMINAL	10.010	16.030	16	AAM1016-16
			25	AAM1016-25
12X15	12.030	15.050	12	AAM1215-12
NOMINAL	12.010	15.030	16	AAM1215-16
			20	AAM1215-20
			25	AAM1215-25
12X16	12.030	16.050	8	AAM1216-08
NOMINAL	12.010	16.030	12	AAM1216-12
			16	AAM1216-16
			20	AAM1216-20
			25	AAM1216-25

	ID (mm)	OD (mm)	LENGTH (mm)	PART NO.
12X18	12.030	18.050	8	AAM1218-08
NOMINAL	12.010	18.030	10	AAM1218-10
			12	AAM1218-12
			16	AAM1218-16
			20	AAM1218-20
			25	AAM1218-25
14X20	14.030	20.060	10	AAM1420-10
NOMINAL	14.010	20.040	12	AAM1420-12
			14	AAM1420-14
			20	AAM1420-20
			30	AAM1420-30
15X19	15.030	19.060	10	AAM1519-10
NOMINAL	15.010	19.040	15	AAM1519-15
			16	AAM1519-16
			20	AAM1519-20
			25	AAM1519-25
15X20	15.030	20.060	15	AAM1520-15
NOMINAL	15.010	20.040	20	AAM1520-20
			25	AAM1520-25
15X22	15.030	22.060	15	AAM1522-15
NOMINAL	15.010	22.040	20	AAM1522-20
			25	AAM1522-25
16X20	16.030	20.060	16	AAM1620-16
NOMINAL	16.010	20.040	20	AAM1620-20
			25	AAM1620-25
			30	AAM1620-30
16X22	16.030	22.060	16	AAM1622-16
NOMINAL	16.010	22.040	20	AAM1622-20
			25	AAM1622-25
18X22	18.030	22.060	18	AAM1822-18
NOMINAL	18.010	22.040	22	AAM1822-22
			28	AAM1822-28
			30	AAM1822-30
18X25	18.030	25.060	18	AAM1825-18
NOMINAL	18.010	25.040	22	AAM1825-22
			28	AAM1825-28
			30	AAM1825-30
20X24	20.030	24.060	16	AAM2024-16
NOMINAL	20.010	24.040	20	AAM2024-20
			25	AAM2024-25
			32	AAM2024-32
20X25	20.030	25.060	15	AAM2025-15
NOMINAL	20.010	25.040	16	AAM2025-16
			20	AAM2025-20
			25	AAM2025-25
			30	AAM2025-30
20X26	20.030	26.060	20	AAM2026-20
NOMINAL	20.010	26.040	30	AAM2026-30
20X28	20.030	28.060	16	AAM2028-16
NOMINAL	20.010	28.030	20	AAM2028-20
			25	AAM2028-25
22X27	22.030	27.060	22	AAM2227-22
NOMINAL	22.010	27.040	28	AAM2227-28
22X28	22.030	28.060	20	AAM2228-20
NOMINAL	22.010	28.040	22	AAM2228-22
			30	AAM2228-30
25X30	25.030	30.060	20	AAM2530-20
NOMINAL	25.010	30.040	25	AAM2530-25
			28	AAM2530-28

	ID (mm)	OD (mm)	LENGTH (mm)	PART NO.
25X30	25.030	30.060	30	AAM2530-30
NOMINAL	25.010	30.040	32	AAM2530-32
(CONT.)			50	AAM2530-50
25X32	25.030	32.070	20	AAM2532-20
NOMINAL	25.010	32.040	25	AAM2532-25
			32	AAM2532-32
			40	AAM2532-40
25X35	25.030	35.070	25	AAM2535-25
NOMINAL	25.010	35.040	35	AAM2535-35
28X32	28.030	32.070	22	AAM2832-22
NOMINAL	28.010	32.040	28	AAM2832-28
28X33	28.030	33.070	22	AAM2833-22
NOMINAL	28.010	33.040	28	AAM2833-28
			30	AAM2833-30
28X36	28.030	36.070	22	AAM2836-22
NOMINAL	28.010	36.040	28	AAM2836-28
			40	AAM2836-40
30X38	30.030	38.070	24	AAM3038-24
NOMINAL	30.010	38.040	30	AAM3038-30
			40	AAM3038-40
30X40	30.030	40.070	25	AAM3040-25
NOMINAL	30.010	40.040	30	AAM3040-30
			50	AAM3040-50
32X40	32.040	40.070	20	AAM3240-20
NOMINAL	32.010	40.040	25	AAM3240-25
			32	AAM3240-32
35X44	35.040	44.070	22	AAM3544-22
NOMINAL	35.010	44.040	28	AAM3544-28
			35	AAM3544-35
35X45	35.040	45.070	25	AAM3545-25
NOMINAL	35.010	45.040	30	AAM3545-30
			35	AAM3545-35
			50	AAM3545-50
40X50	40.040	50.070	25	AAM4050-25
NOMINAL	40.010	50.040	30	AAM4050-30
			35	AAM4050-35
			40	AAM4050-40
			60	AAM4050-60
45X55	45.040	55.080	35	AAM4555-35
NOMINAL	45.010	55.050	40	AAM4555-40
			45	AAM4555-45
			50	AAM4555-50
			55	AAM4555-55
45X56	45.040	56.080	35	AAM4556-35
NOMINAL	45.010	56.050	50	AAM4556-50
			56	AAM4556-56
50X60	50.040	60.080	35	AAM5060-35
NOMINAL	50.010	60.050	50	AAM5060-50
			63	AAM5060-63
			70	AAM5060-70
			75	AAM5060-75



Oilite® M Series®

METRIC FLANGE BEARINGS

	ID (mm)	OD (mm)	LENGTH (mm)	FLANGE OD (mm)	FLANGE THK. (mm)	PART NO.
3 X 6	3.020	6.040	4	9	1.5	FFM0306-04
NOMINAL	3.000	6.020	6			FFM0306-06
4 X 7	4.020	7.040	6	10	1.5	FFM0407-06
NOMINAL	4.000	7.020	10			FFM0407-10
5 X 8	5.020	8.040	5	11	1.5	FFM0508-05
NOMINAL	5.000	8.020	6			FFM0508-06
			10			FFM0508-10
6 X 9	6.020	9.040	5	12	1.5	FFM0609-05
NOMINAL	6.000	9.020	6			FFM0609-06
			10			FFM0609-10
			12			FFM0609-12
6 X 10	6.020	10.040	4	14	2	FFM0610-04
NOMINAL	6.000	10.020	6			FFM0610-06
			10			FFM0610-10
			16			FFM0610-16
8 X 11	8.030	11.050	6	14	1.5	FFM0811-06
NOMINAL	8.010	11.030	10			FFM0811-10
			12			FFM0811-12
8 X 12	8.030	12.050	8	16	2	FFM0812-08
NOMINAL	8.010	12.030	12			FFM0812-12
			16			FFM0812-16
10 X 13	10.030	13.050	6	16	1.5	FFM1013-06
NOMINAL	10.010	13.030	8			FFM1013-08
			10			FFM1013-10
			12			FFM1013-12
			16			FFM1013-16
			20			FFM1013-20
10 X 16	10.030	16.050	8	22	3	FFM1016-08
NOMINAL	10.010	16.030	10			FFM1016-10
			12			FFM1016-12
			16			FFM1016-16
12 X 15	12.030	15.050	8	18	1.5	FFM1215-08
NOMINAL	12.010	15.030	10			FFM1215-10
			12			FFM1215-12
			16			FFM1215-16
			20			FFM1215-20
12 X 17	12.030	17.050	12	23	3	FFM1217-12
NOMINAL	12.010	17.030	16			FFM1217-16
			20			FFM1217-20
			25			FFM1217-25
12 X 18	12.030	18.050	8	24	3	FFM1218-08
NOMINAL	12.010	18.030	10			FFM1218-10
			12			FFM1218-12
			16			FFM1218-16
			20			FFM1218-20
14 X 18	14.030	18.050	12	22	2	FFM1418-12
NOMINAL	14.010	18.030	20			FFM1418-20
			22			FFM1418-22
14 X 20	14.030	20.050	10	26	3	FFM1420-10
NOMINAL	14.010	20.030	14			FFM1420-14
			18			FFM1420-18
			20			FFM1420-20
15 X 19	15.030	19.060	12	23	2	FFM1519-12
NOMINAL	15.010	19.040	20			FFM1519-20
			25			FFM1519-25

	ID (mm)	OD (mm)	LENGTH (mm)	FLANGE OD (mm)	FLANGE THK. (mm)	PART NO.
16 X 20	16.030	20.060	12	24	2	FFM1620-12
NOMINAL	16.010	20.040	16			FFM1620-16
			20			FFM1620-20
			25			FFM1620-25
16 X 22	16.030	22.060	12	28	3	FFM1622-12
NOMINAL	16.010	22.040	16			FFM1622-16
			20			FFM1622-20
			25			FFM1622-25
18 X 22	18.030	22.060	12	26	2	FFM1822-12
NOMINAL	18.010	22.040	18			FFM1822-18
			20			FFM1822-20
			25			FFM1822-25
20 X 24	20.030	24.060	12	28	2	FFM2024-12
NOMINAL	20.010	24.040	16			FFM2024-16
			20			FFM2024-20
			25			FFM2024-25
20 X 26	20.030	26.060	12	32	3	FFM2026-12
NOMINAL	20.010	26.040	16			FFM2026-16
			20			FFM2026-20
			25			FFM2026-25
			30			FFM2026-30
22 X 28	22.030	28.060	16	34	3	FFM2228-16
NOMINAL	22.010	28.040	20			FFM2228-20
			25			FFM2228-25
25 X 30	25.030	30.060	20	39	3.5	FFM2530-20
NOMINAL	25.010	30.040	25			FFM2530-25
			30			FFM2530-30
			32			FFM2530-32
25 X 32	25.030	32.060	20	39	3.5	FFM2532-20
NOMINAL	25.010	32.040	25			FFM2532-25
			30			FFM2532-30
30 X 38	30.030	38.070	20	46	4	FFM3038-20
NOMINAL	30.010	38.040	25			FFM3038-25
			30			FFM3038-30
32 X 38	32.040	38.070	20	46	4	FFM3238-20
NOMINAL	32.010	38.040	25			FFM3238-25
			32			FFM3238-32
35 X 40	35.040	40.070	25	45	2.5	FFM3540-25
NOMINAL	35.010	40.040	32			FFM3540-32
40 X 46	40.040	46.070	20	56	5	FFM4046-20
NOMINAL	40.010	46.040	25			FFM4046-25
			32			FFM4046-32
			40			FFM4046-40
45 X 51	45.040	51.080	25	57	3	FFM4551-25
NOMINAL	45.010	51.050	32			FFM4551-32
50 X 60	50.040	60.080	32	70	5	FFM5060-32
NOMINAL	50.010	60.050	35			FFM5060-35
			40			FFM5060-40
			50			FFM5060-50



Super Oilite®
BEARINGS



oilite®



SLEEVE BEARINGS

	ID	OD	LENGTH	PART NO.
1/4X5/16	.252	.314	1/4	SOA-334-1
NOMINAL	.251	.313	3/8	SOA-334-2
			1/2	SOA-334-3
1/4X3/8	.252	.377	1/4	SOA-307
NOMINAL	.251	.376	3/8	SOA-307-9
			1/2	SOA-307-3
			3/4	SOA-307-11
			1	SOA-307-2
3/8X1/2	.3765	.503	1/4	SOA-507-19
NOMINAL	.3755	.502	3/8	SOA-507-11
			1/2	SOA-507-10
			3/4	SOA-507-2
			1	SOA-507-23
1/2X5/8	.502	.628	3/8	SOA-632-1
NOMINAL	.501	.627	1/2	SOA-632-2
			5/8	SOA-632-3
			3/4	SOA-632-4
			1	SOA-632-6
			1-1/2	SOA-632-12

	ID	OD	LENGTH	PART NO.
1/2X3/4	.5025	.753	1/2	SOA-744-5
NOMINAL	.5015	.752	3/4	SOA-744-4
			1	SOA-744-3
			1-1/2	SOA-744-1
5/8X3/4	.628	.753	1/2	SOA-710-27
NOMINAL	.627	.752	5/8	SOA-710-19
			3/4	SOA-710-6
			1	SOA-710-3
			1-1/2	SOA-710-4
3/4X1	.753	1.003	1/2	SOA-1043-1
NOMINAL	.752	1.002	3/4	SOA-1043-6
			1	SOA-1043-9
			1-1/4	SOA-1043
			1-1/2	SOA-1043-4
1X1-1/4	1.003	1.253	1/2	SOA-1232-1
NOMINAL	1.002	1.252	3/4	SOA-1232-6
			1	SOA-1232
			1-1/4	SOA-1232-3
			1-1/2	SOA-1232-7
			1-3/4	SOA-1232-8
			2	SOA-1232-4


	ID	OD	LENGTH	PART NO.
1-1/4X1-1/2	1.253	1.504	3/4	SOA-1524-2
NOMINAL	1.2515	1.5025	1	SOA-1524-3
			1-1/4	SOA-1524-4
			1-1/2	SOA-1524-5
			1-3/4	SOA-1524-11
			2	SOA-1524-13
1-1/2X1-3/4	1.503	1.7545	3/4	SOA-1704-16
NOMINAL	1.501	1.7525	1	SOA-1704-15
			1-1/4	SOA-1704-11
			1-1/2	SOA-1704
			1-3/4	SOA-1704-3
			2	SOA-1704-2

FLANGE BEARINGS

	ID	OD	LENGTH	FLANGE OD	FLANGE THICKNESS	PART NO.
1/4X3/8	.252	.377	1/4	1/2	1/16	SOF-317-1
NOMINAL	.251	.376	3/8			SOF-317-2
			1/2			SOF-317-3
5/16X7/16	.3135	.440	3/8	9/16	1/16	SOF-411-1
NOMINAL	.3125	.439	1/2			SOF-411-2
			3/4			SOF-411-3
			7/8			SOF-411-4
3/8X1/2	.377	.503	1/4	11/16	1/16	SOF-318-1
NOMINAL	.376	.502	1/2			SOF-318-2
			3/4			SOF-318-3
3/8X5/8	.377	.628	1/2	7/8	1/16	SOF-319-1
NOMINAL	.376	.627	3/4			SOF-319-2
			1			SOF-319-3
1/2X5/8	.502	.627	3/8	7/8	1/8	SOF-611-1
NOMINAL	.501	.626	1/2			SOF-611-2
			5/8			SOF-611-3
			3/4			SOF-611-4
			1			SOF-611-6
1/2X3/4	.503	.753	1/2	1	1/8	SOF-621-1
NOMINAL	.502	.752	3/4			SOF-621-3
			1			SOF-621-4
5/8X3/4	.626	.753	1/2	1	1/8	SOF-711-1
NOMINAL	.625	.752	5/8			SOF-711-2
			3/4			SOF-711-3
			1			SOF-711-4
3/4X7/8	.752	.879	1/2	1-1/8	1/8	SOF-854-1
NOMINAL	.751	.878	3/4			SOF-854-2
			1			SOF-854-3
3/4X1	.752	1.004	5/8	1-1/4	3/16	SOF-1016-1
NOMINAL	.751	1.003	3/4			SOF-1016-2
			1			SOF-1016-3
			1-1/4			SOF-1016-4
1X1-1/4	1.001	1.252	3/4	1-1/2	1/8	SOF-1213-1
NOMINAL	1.000	1.251	1			SOF-1213-2
			1-1/4			SOF-1213-5
			1-1/2			SOF-1213-4

THRUST BEARINGS

	ID	OD	THICKNESS	PART NO.
1/4X5/8	.256	.629	1/16	SOT-601
NOMINAL	.246	.609		
3/8X3/4	.391	.751	1/16	SOT-710-1
NOMINAL	.381	.731	1/8	SOT-710-2
1/2X3/4	.510	.760	1/16	SOT-706
NOMINAL	.500	.740		
1/2X1	.510	.999	1/16	SOT-1001
NOMINAL	.500	.979	1/8	SOT-1001-1
5/8X1	.629	.999	1/16	SOT-1002-1
NOMINAL	.619	.979	1/8	SOT-1002
3/4X1-1/4	.752	1.246	1/16	SOT-1205
NOMINAL	.742	1.226	1/8	SOT-1205-1
3/4X1-3/4	.762	1.740	1/8	SOT-1701
NOMINAL	.752	1.720		
1X1-1/2	1.000	1.494	1/16	SOT-1502-2
NOMINAL	.990	1.474	1/8	SOT-1502
			3/16	SOT-1502-1
1X2	1.013	1.993	1/8	SOT-2001
NOMINAL	1.003	1.973	3/16	SOT-2001-1
1-1/4X2	1.267	2.008	1/16	SOT-2006
NOMINAL	1.257	1.978	1/8	SOT-2006-1
1-1/2X2-1/2	1.517	2.527	1/8	SOT-2005
NOMINAL	1.497	2.497		



Super Oilite®
RAW MATERIALS

SUPER OILITE BAR STOCK

Super-Oilite is an oil cushioned, self-lubricating bearing material with a ferrous base. Therefore it is somewhat stronger than OILITE bronze—especially for heavy loading at slow speeds—and considerably more economical. Its overall rating, however, is not as high as OILITE bronze for general bearing purposes. It is available in both cored and solid bar stock which can be machined for emergency repairs, prototypes and new design requirements.

CORED

5" LENGTHS

Will finish to dimensions shown.

ID	OD	PART NO.
1/2	1	SSC-1000
	1-7/16	SSC-1402
3/4	1-3/16	SSC-1102
	1-9/16	SSC-1500
	1-15/16	SSC-1900
1	1-11/16	SSC-1601
	2-3/16	SSC-2100
1-1/4	1-11/16	SSC-1602
	2-3/16	SSC-2103
	2-7/8	SSC-2803
1-1/2	1-15/16	SSC-1904
1-3/4	2-1/2	SSC-2504
	3	SSC-3004
2	2-5/8	SSC-2600
	3	SSC-3005
2-1/2	3-3/8	SSC-3301
	4-1/8	SSC-4102
3	4-7/8	SSC-4802

SOLID

5" LENGTHS

Will finish to dimensions shown.

DIAMETER	PART NO.
3/8	SSS-300†
1/2	SSS-500††
5/8	SSS-600
3/4	SSS-700
7/8	SSS-800
1	SSS-1000
1-3/16	SSS-1100
1-5/16	SSS-1300
1-9/16	SSS-1500
1-13/16	SSS-1800
2-1/16	SSS-2000
2-7/8	SSS-2800

† LENGTH – 3"

†† LENGTH – 6-1/2"



Oilite[®] Non-Tox[®]

BEARINGS

An Excellent Solution for the Food Processing Industry

- Available in Oilite[®], Super-Oilite[®] and M-Series[®] (metric) self lubrication sleeve and flange bearings.
- Available in a variety of materials and sizes allowing for easy substitution.



oilite[®]



OILITE® NON-TOX®

- Lubricant meets USDA H-1 standards.
- RoHS Compliant.
- Lubricant can extend bearing life at higher and lower operating temperatures (-75°F to +300°F).
- All bearings are individually packaged to ensure clean storage and installation.

SLEEVE BEARINGS

	ID	OD	LENGTH	PART NO.
1/4 X 3/8	.252	.377	1/4	AA-307-NT
NOMINAL	.251	.376	3/8	AA-307-9NT
			1/2	AA-307-3NT
3/8 X 1/2	.3765	.503	3/8	AA-507-11NT
NOMINAL	.3755	.502	1/2	AA-507-10NT
			1/4	AA-507-19NT
1/2 X 5/8	.502	.628	1/2	AA-632-2NT
NOMINAL	.501	.627	5/8	AA-632-3NT
			3/4	AA-632-4NT
5/8 X 3/4	.627	.753	1/2	AA-710-27NT
NOMINAL	.626	.752	5/8	AA-710-19NT
			3/4	AA-710-6NT
			1	AA-710-3NT
3/4 X 1	.753	1.003	3/4	AA-1043-6NT
NOMINAL	.752	1.002	1	AA-1043-9NT
			1-1/2	AA-1043-4NT
1 X 1-1/4	1.003	1.253	1	AA-1232-NT
NOMINAL	1.002	1.252	1-1/4	AA-1232-3NT
			1-1/2	AA-1232-7NT
1-1/4 X 1-1/2	1.252	1.502	1	AA-1512-15NT
NOMINAL	1.251	1.501	1-1/4	AA-1512-16NT
			1-1/2	AA-1512-2NT
1-1/2 X 1-3/4	1.503	1.754	1-1/4	AA-1704-11NT
NOMINAL	1.502	1.7525	2	AA-1704-2NT

FLANGE BEARINGS

	ID	OD	LENGTH	FLANGE OD	FLANGE THICKNESS	PART NO.
1/4 X 3/8	.252	.378	1/4	1/2	1/16	FF-317-1NT
NOMINAL	.251	.377	3/8			FF-317-2NT
3/8 X 1/2	.377	.503	1/4	11/16	1/16	FF-318-1NT
NOMINAL	.376	.502	3/8			FF-318-5NT
1/2 X 5/8	.502	.627	1/2	7/8	1/16	FF-620-1NT
NOMINAL	.501	.626	3/4			FF-620-2NT
3/4 X 1	.752	1.004	3/4	1-1/4	3/16	FF-1016-2NT
NOMINAL	.751	1.003	1			FF-1016-3NT
1 X 1-1/4	1.001	1.252	3/4	1-1/2	1/8	FF-1213-1NT
NOMINAL	1.000	1.251	1-1/2			FF-1213-4NT

THRUST BEARINGS

	ID	OD	THICKNESS	PART NO.
1/2 X 1	.515	1.010	1/16	TT-1001-NT
NOMINAL	.505	.990	1/8	TT-1001-1NT
5/8 X 1	.633	1.010	1/16	TT-1002-1NT
NOMINAL	.623	.990	1/8	TT-1002-NT
3/4 X 1-1/4	.758	1.260	1/16	TT-1205-NT
NOMINAL	.748	1.240	1/8	TT-1205-1NT
3/4 X 1-3/4	.770	1.765	1/8	TT-1701-NT
NOMINAL	.760	1.735		
1 X 1-1/2	1.008	1.519	1/16	TT-1502-2NT
NOMINAL	.998	1.489	1/8	TT-1502-NT
			3/16	TT-1502-1NT
1 X 2	1.021	2.015	1/8	TT-2001-NT
NOMINAL	1.011	1.985	3/16	TT-2001-1NT



OILITE® NON-TOX® M SERIES

- Lubricant meets USDA H-1 standards.
- RoHS Compliant.
- Lubricant can extend bearing life at higher and lower operating temperatures (-75°F to +300°F).
- All bearings are individually packaged to ensure clean storage and installation.

SLEEVE BEARINGS

	ID (mm)	OD (mm)	LENGTH (mm)	PART NO.
6 X 10	6.020	10.040	10	AAM0610-10NT
NOMINAL	6.000	10.020	12	AAM0610-12NT
8 X 12	8.030	12.040	8	AAM0812-08NT
NOMINAL	8.010	12.030	12	AAM0812-12NT
			16	AAM0812-16NT
10 X 14	10.030	14.050	10	AAM1014-10NT
NOMINAL	10.010	14.030	16	AAM1014-16NT
10 X 16	10.030	16.050	16	AAM1016-16NT
NOMINAL	10.010	16.030	20	AAM1016-20NT
			25	AAM1016-25NT
12 X 14	12.030	14.050	16	AAM1214-16NT
NOMINAL	12.010	14.030	20	AAM1214-20NT
12 X 16	12.030	16.050	8	AAM1216-08NT
NOMINAL	12.010	16.030	10	AAM1216-10NT
			12	AAM1216-12NT
			16	AAM1216-16NT
			20	AAM1216-20NT
16 X 20	16.030	20.060	16	AAM1620-16NT
NOMINAL	16.010	20.040	20	AAM1620-20NT
			25	AAM1620-25NT
20 X 25	20.030	25.060	25	AAM2025-25NT
NOMINAL	20.010	25.040	30	AAM2025-30NT
25 X 30	25.030	30.060	20	AAM2530-20NT
NOMINAL	25.010	30.040	25	AAM2530-25NT
			30	AAM2530-30NT
30 X 40	30.030	40.070	30	AAM3040-30NT
NOMINAL	30.010	40.040	35	AAM3040-35NT
35 X 45	35.040	45.070	40	AAM3545-40NT
NOMINAL	35.010	45.040	50	AAM3545-50NT
40 X 50	40.040	50.070	40	AAM4050-40NT
NOMINAL	40.010	50.040	50	AAM4050-50NT



SUPER OILITE® NON-TOX®

- Lubricant meets USDA H-1 standards.
- RoHS Compliant.
- Lubricant can extend bearing life at higher and lower operating temperatures (-75°F to +300°F).
- All bearings are individually packaged to ensure clean storage and installation.

SLEEVE BEARINGS


	ID	OD	LENGTH	PART NO.
1/4X3/8	.252	.377	3/8	SOA-307-9NT
NOMINAL	.251	.376	1/4	SOA-307-NT
			1/2	SOA-307-3NT
3/8X1/2	.3765	.503	1/2	SOA-507-10NT
NOMINAL	.3755	.502	3/8	SOA-507-11NT
1/2X5/8	.502	.628	1/2	SOA-632-2NT
NOMINAL	.501	.627	3/4	SOA-632-4NT
5/8X3/4	.627	.753	1/2	SOA-710-27NT
NOMINAL	.626	.752	1	SOA-710-3NT
3/4X1	.753	1.003	3/4	SOA-1043-6NT
NOMINAL	.752	1.002	1	SOA-1043-9NT
1X1-1/4	1.003	1.253	1	SOA-1232-NT
NOMINAL	1.002	1.252	1-1/4	SOA-1232-3NT

FLANGE BEARINGS

	ID	OD	LENGTH	FLANGE OD	FLANGE THICKNESS	PART NO.
1/4X3/8	.252	.377	1/4	1/2	1/16	SOF-317-1NT
NOMINAL	.251	.376	3/8			SOF-317-2NT
3/8X1/2	.377	.503	1/4	11/16	1/16	SOF-318-1NT
NOMINAL	.376	.502	3/8			SOF-318-5NT
1/2X5/8	.502	.627	1/2	7/8	1/16	SOF-620-1NT
NOMINAL	.501	.626	3/4			SOF-620-2NT
3/4X1	.752	1.004	3/4	1-1/4	3/16	SOF-1016-2NT
NOMINAL	.751	1.003	1			SOF-1016-3NT
1X1-1/4	1.001	1.252	3/4	1-1/2	1/8	SOF-1213-1NT
NOMINAL	1.000	1.251	1-1/2			SOF-1213-4NT

THRUST BEARINGS

	ID	OD	THICKNESS	PART NO.
1/2X1	.510	.999	1/16	SOT-1001-NT
NOMINAL	.500	.979	1/8	SOT-1001-1NT
5/8X1	.629	.999	1/16	SOT-1002-1NT
NOMINAL	.619	.979	1/8	SOT-1002-NT
3/4X1-1/4	.752	1.246	1/16	SOT-1205-NT
NOMINAL	.742	1.226	1/8	SOT-1205-1NT
3/4X1-3/4	.762	1.740	1/8	SOT-1701-NT
NOMINAL	.752	1.720		
1X1-1/2	1.000	1.494	1/16	SOT-1502-2NT
NOMINAL	.990	1.474	1/8	SOT-1502-NT
			3/16	SOT-1502-1NT
1X2	1.013	1.993	1/8	SOT-2001-NT
NOMINAL	1.003	1.973	3/16	SOT-2001-1NT

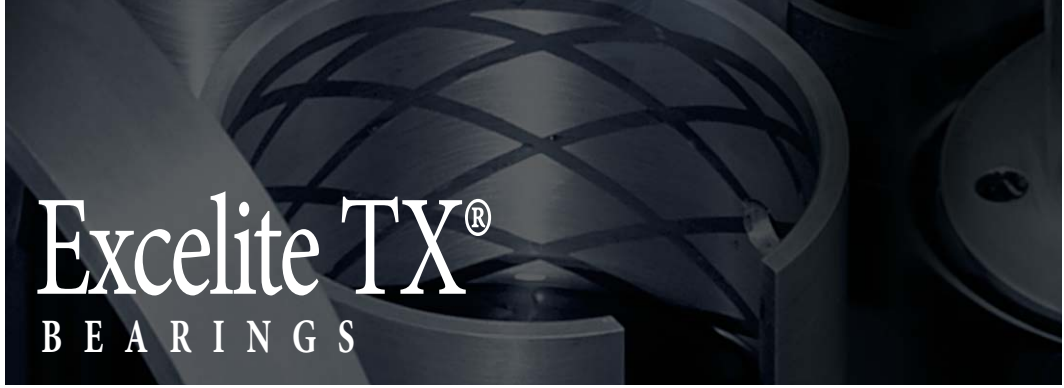

oilite®

Excelite TX[®]

THE SYSTEM

Excelite TX. A unique bearing combining proven materials with a three-tiered, self-contained lubrication feature. This bearing was developed for high load, low speed application and is ideally suited for all types of rotating and oscillating motion. Additional lubrication introduced to the bearing where necessary can further performance.

THE ADVANTAGE


Excelite TX has many cost saving benefits in addition to its performance features. Unlike composite or strip bearings, Excelite TX's entire wall thickness is made of the bearing material. Standard sizes listed are arranged to be compatible with standard cast bronze bushings and are designed to be installed without subsequent sizing operations. The Excelite TX Advantage...versatility of design and cost reduction.

THE APPLICATIONS

- Agricultural Equipment
- Glass Processing Machines
- Golf and Lawn Vehicles
- Material Handling Trucks
- Earth Moving Equipment
- Paper and Textile Machines
- Cable Handling Equipment
- Construction Cranes
- Packaging Machines
- Hoisting Devices
- Hydraulic Cylinders
- Printing Presses
- Filling Equipment
- Valves

EXCELITE DTX[®]

Excelite DTX has grease pockets on the bearing surface. These pockets can store lubricants generated directly from the bearing itself or those introduced externally. These same pockets can also provide a place for foreign contaminants to collect and thus prolong bearing life. Consult our sales engineers for additional application and design information.



EXCELITE HTX[®]

This self-lubricating material is the extreme duty Excelite bearing material ideally suited for the most demanding applications. Shafting used against Excelite HTX should be Rockwell 45C or higher, and the best possible finish should be maintained. Excelite HTX bearings are available in the sizes listed in the Excelite TX section.

GENERAL CHARACTERISTICS

LOADS AND SPEEDS

The best method for evaluating the acceptability of Excelite TX bearings for any given application is by using PV factor (Pressure x Surface Velocity) where:

P = the load in (psi) on the projected bearing area (Bearing ID x Length).

V = surface velocity of the shaft in feet per minute (SFM).

$$PV = \frac{W}{LD} \times \frac{\pi DN}{12} = \frac{3.14 WN}{12L}$$

W = total load on bearing (pounds)

L = bearing length (inches)

D = ID of bearing (inches)

N = shaft speed (rpm)

MATERIAL	NORMAL UPPER LIMITS FOR EXCELITE MATERIALS			V (sfm)
	PV	P (psi) STATIC	P (psi) DYNAMIC	
EXCELITE TX	40,000	25,000	5,000	220
EXCELITE HTX	70,000	40,000	7,500	40

BP3⁺ + MOLYBDENUM DISULFIDE

CHARACTERISTICS	HIGH FILM STRENGTH
VISCOSITY (SUS) @100°F	2420
@210°F	141
VISCOSITY INDEX	90
FLASH POINT (°F)	460
FIRE POINT (°F)	525
POUR POINT (°F)	+10
SAE EQUIV. (VISCOSITY)	130 (EP)**

BP3⁺ and Moly has an extremely stable suspension of uniform microscopic Molybdenum Disulfide particles. As an additive Molybdenum Disulfide substantially improves the extreme pressure, anti-wear, and anti-friction capabilities of oils and provides reliable lubrication in those demanding applications that approach boundary lubrication conditions.

** EXTREME PRESSURE

TYPICAL PROPERTIES*

PROPERTIES	EXCELITE TX	EXCELITE HTX
Component Percent		
COPPER	19.0 - 23.0	19.0 - 23.0
IRON	BALANCE	BALANCE
LEAD	—	—
CARBON	.3 - .6	.8 - 1.0
TIN	—	—
ACID INSOLUBLES (MAX.)	—	—
MAGNESIUM	—	—
TOTAL OTHER ELEMENTS (MAX.)	2.5	2.5
BALANCE	—	—

Physical & Mechanical Properties

DENSITY (GM PER CU. CM)	5.9 - 6.3	6.2 - 6.6
POROSITY (% OIL BY VOL.)	18 MIN.	15 MIN.
"K" STRENGTH CONSTANT	50,000	75,000
TENSILE STRENGTH	30,000	40,000
ELONGATION (% IN ONE INCH)	2%	1%
YIELD STRENGTH IN COMP. (PSI)**	30,000	45,000

* Bearings may exhibit appreciable differences in properties due to size, shape, thickness, etc.

** For .001" permanent set on text specimens 1-1/4" diameter by 1" long.

Excelite materials may be altered due to operation conditions and life expectancy requirements. It is possible to change the base material by heat treating or alloy change. It is also possible to vary the lubricant specs or add grooving. Changing the fluorocarbon coating is also done.

NO "BREAK IN"

Excelite TX virtually eliminates "break in" because of the PTFE coating applied to the bearing surface providing low coefficient of friction for start up.

LONG LIFE

As long as load rating and maximum speed rates are adhered to, Excelite TX can provide good life expectancy. The PTFE coating lasts far beyond "break in", and the fully impregnated P/M under infrastructure takes over to provide expected life.

PTFE VALUES

PROPERTY	"PTFE" VALUE
TENSILE STRENGTH @ 77°F (psi) @ 25°C (kg/cm ²)	3,000 - 13,600 200 - 920
ELONGATION @ 77°F/25°C (percent)	1 - 9
STATIC COEFFICIENT OF FRICTION AGAINST POLISHED STEEL	0.15
DIELECTRIC STRENGTH, SHORT TIME, 4 MIL FIL (volts/mil) 100 MICRON FILM (volts/micron)	400 - 1400 20 - 100
DIELECTRIC CONSTANT @ 10 ⁶ cycles/sec	1.2 - 600
DISSIPATION FACTOR @ 10 ⁶ cycles/sec	0.002 - 1.0
VOLUME RESISTIVITY, 50% RELATIVE HUMIDITY (ohm-cm)	10 ¹¹ - 10 ¹³
SURFACE RESISTIVITY, 50% RELATIVE HUMIDITY (ohms)	10 ⁸ - 10 ¹³
WATER ABSORPTION (percent)	<2 TO <4
USE TEMPERATURE	-50°F TO +450°F -45°F TO +232°C
RESISTANCE TO ABRASION: GRAMS ABRASIVE PER MIL GRAMS ABRASIVE PER MICRON TEST METHOD: BELL ABRASION TESTER	30 - 50 1.2 - 2.0
HARDNESS: TUKON HARDNESS TEST (knoop) SWARD ROCKER TEST	9 - 18 46 - 62
CONTACT ANGLE (degrees): WATER HEXADECANE	80 - 110 30 - 50

The values shown in this table represent average experience from numerous testing sources and are not intended to be specifications. These values will vary depending upon the individual compositions of the primers and topcoats and the systems used. All technical advice recommendations, application suggestions and services are rendered by the Seller gratis. They are based on technical data which the seller believes to be reliable and are intended for use by persons having skill and know how at their own discretion and risk. Seller assumes no responsibility for results obtained or damages incurred from their use by Buyer in whole or in part.


INSTALLATION and SIZING

Bearings are usually installed by means of a shouldered arbor plug inserted in an arbor press. (See chart of press fit values below.) A chamfer in the housing bore is necessary to serve as a lead for the bearing. An unchamfered edge might shear metal from the bearing OD, seriously reducing the

press fit. The OD on the lead end of the bearing acts as a pilot. Likewise, the ID chamfer in the bearings serves as a lead when the shaft is inserted. Out-of-roundness is corrected when the bearing is pressed into the housing.


PRESS FIT VALUES / BEARING CLEARANCE / ID CLOSE-IN

PRESS FIT VALUES

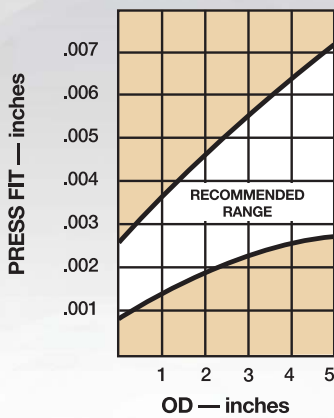


Considerable force is required to seat large bearings when press fit approaches the top of the recommended range. Excelite TX bearings can tolerate these press fits and are necessary to keep the bearings secure in the housing.


BEARING CLEARANCE

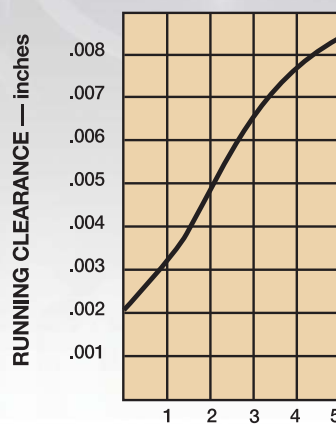

ID CLOSE-IN

As related to wall thickness (Approximate Values) for Normal Press Fit

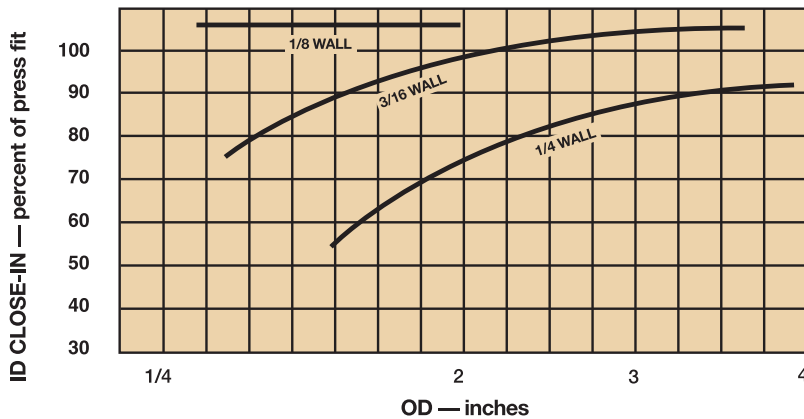



Excelite TX[®]

SLEEVE BEARINGS

ID	OD	LENGTH	PART NO.	ID	OD	LENGTH	PART NO.	ID	OD	LENGTH	PART NO.			
1/2X5/8	.5055	.628	1/2	TX0810-04	1-1/4X1-1/2	1.2565	1.5035	1-3/4	TX2024-14	1-3/4X2-1/4	1.7585	2.255	1-3/4	TX2836-14
NOMINAL	.5045	.627	5/8	TX0810-05	NOMINAL	1.255	1.502	2	TX2024-16	NOMINAL	1.7565	2.253	2	TX2836-16
			3/4	TX0810-06	(CONT.)			2-1/4	TX2024-18				2-1/2	TX2836-20
			7/8	TX0810-07				2-1/2	TX2024-20				3	TX2836-24
			1	TX0810-08	1-1/4X1-5/8	1.2565	1.6295	1	TX2026-08	2X2-1/4	2.008	2.255	2	TX3236-16
1/2X3/4	.5055	.753	3/4	TX0812-06	NOMINAL	1.255	1.6275	1-1/4	TX2026-10	NOMINAL	2.006	2.253	2-1/2	TX3236-20
NOMINAL	.5045	.752	1	TX0812-08				1-1/2	TX2026-12					
			1-1/4	TX0812-10				1-3/4	TX2026-14					
								2	TX2026-16					
5/8X3/4	.6285	.753	3/4	TX1012-06				2-1/4	TX2026-18	2X2-3/8	2.008	2.380	2	TX3238-16
NOMINAL	.6275	.752	1	TX1012-08				2-1/2	TX2026-20	NOMINAL	2.006	2.378	2-1/2	TX3238-20
			1-1/4	TX1012-10									3	TX3238-24
													3-1/2	TX3238-28
5/8X7/8	.6285	.878	3/4	TX1014-06	1-1/4X1-3/4	1.2565	1.7545	1-1/4	TX2028-10	2-1/4X2-1/2	2.258	2.505	2	TX3640-16
NOMINAL	.6275	.877	1	TX1014-08	NOMINAL	1.255	1.7525	1-1/2	TX2028-12	NOMINAL	2.256	2.503	2-1/2	TX3640-20
			1-1/4	TX1014-10				1-3/4	TX2028-14				3	TX3640-24
			1-1/2	TX1014-12				2	TX2028-16				3-1/2	TX3640-28
			1-3/4	TX1014-14				2-1/4	TX2028-18					
								2-1/2	TX2028-20					
								2-3/4	TX2028-22					
								3	TX2028-24					
3/4X7/8	.7555	.878	3/4	TX1214-06	1-3/8X1-5/8	1.3815	1.6295	1-1/4	TX2226-10	2-1/4X2-3/4	2.258	2.755	2	TX3644-16
NOMINAL	.7545	.877	1	TX1214-08	NOMINAL	1.380	1.6275	1-1/2	TX2226-12	NOMINAL	2.256	2.753	2-1/2	TX3644-20
			1-1/4	TX1214-10				1-3/4	TX2226-14				3	TX3644-24
								2	TX2226-16				3-1/2	TX3644-28
								2	TX2226-18				3-3/4	TX3644-30
								2-1/4	TX2226-20				4	TX3644-32
								2-1/2	TX2226-22					
3/4X1	.7555	1.003	3/4	TX1216-06	1-3/8X1-3/4	1.3815	1.7545	1-1/4	TX2228-10	2-1/2X2-3/4	2.510	2.755	2	TX4044-16
NOMINAL	.7545	1.002	1	TX1216-08	NOMINAL	1.380	1.7525	1-1/2	TX2228-12	NOMINAL	2.508	2.753	2-1/2	TX4044-20
			1-1/4	TX1216-10				1-3/4	TX2228-14				3	TX4044-24
			1-1/2	TX1216-12				2	TX2228-16				3-1/2	TX4044-28
			1-3/4	TX1216-14				2-1/4	TX2228-18				3-3/4	TX4044-30
			2	TX1216-16				2-1/2	TX2228-20				4	TX4044-32
								2-3/4	TX2228-22					
7/8X1	.8795	1.003	3/4	TX1416-06	1-1/2X1-3/4	1.508	1.7545	1-1/4	TX2428-10	2-1/2X3	2.510	3.006	2	TX4048-16
NOMINAL	.8785	1.002	1	TX1416-08	NOMINAL	1.5065	1.7525	1-1/2	TX2428-12	NOMINAL	2.508	3.003	2-1/2	TX4048-20
			1-1/4	TX1416-10				1-3/4	TX2428-14				3	TX4048-24
			1-1/2	TX1416-12				2	TX2428-16				3-1/2	TX4048-28
			1-3/4	TX1416-14				2-1/4	TX2428-18				3-3/4	TX4048-30
			2	TX1416-16				2-1/2	TX2428-20				4	TX4048-32
7/8X1-1/8	.8795	1.128	3/4	TX1418-06	1-1/2X1-7/8	1.508	1.880	1-1/4	TX2430-10	2-3/4X3-1/4	2.7585	3.256	2-3/4	TX4452-22
NOMINAL	.8785	1.127	1	TX1418-08	NOMINAL	1.5065	1.878	1-1/2	TX2430-12	NOMINAL	2.7565	3.253	3	TX4452-24
			1-1/4	TX1418-10				1-3/4	TX2430-14				3-1/2	TX4452-28
			1-1/2	TX1418-12				2	TX2430-16				3-3/4	TX4452-30
			1-3/4	TX1418-14				2-1/4	TX2430-18				4	TX4452-32
			2	TX1418-16				2-1/2	TX2430-20					
								2-3/4	TX2430-22					
								3	TX2430-24					
1X1-1/4	1.006	1.253	3/4	TX1620-06	1-1/2X2	1.508	2.005	1-1/4	TX2432-10	3X3-1/2	3.015	3.506	2	TX4856-16
NOMINAL	1.005	1.252	1	TX1620-08	NOMINAL	1.5065	1.878	1-1/2	TX2432-12	NOMINAL	3.008	3.503	3	TX4856-24
			1-1/4	TX1620-10				1-3/4	TX2432-14				3-1/2	TX4856-28
			1-1/2	TX1620-12				2	TX2432-16				3-3/4	TX4856-30
			1-3/4	TX1620-14				2-1/4	TX2432-18				4	TX4856-32
			2	TX1620-16				2-1/2	TX2432-20					
			2-1/4	TX1620-18				2-3/4	TX2432-22					
			2-1/2	TX1620-20				3	TX2432-24					
								3-1/2	TX2432-28					
1X1-3/8	1.006	1.3785	3/4	TX1622-06	1-1/8X2	1.633	2.005	1-1/2	TX2632-12	3-1/2X4	3.515	4.007	3	TX5664-24
NOMINAL	1.005	1.377	1	TX1622-08	NOMINAL	1.631	2.003	1-3/4	TX2632-14	NOMINAL	3.508	4.004	3-1/2	TX5664-28
			1-1/4	TX1622-10				2	TX2632-16				4	TX5664-32
			1-1/2	TX1622-12				2-1/4	TX2632-18					
			1-3/4	TX1622-14				2-1/2	TX2632-20					
			2	TX1622-16				2-3/4	TX2632-22					
			2-1/4	TX1622-18				3	TX2632-24					
			2-1/2	TX1622-20				3-1/2	TX2632-28					
1-1/8X1-3/8	1.130	1.3785	1	TX1822-08	1-5/8X2	1.633	2.005	1-1/2	TX2632-12					
NOMINAL	1.1285	1.377	1-1/4	TX1822-10	NOMINAL	1.631	2.003	1-3/4	TX2632-14					
			1-1/2	TX1822-12				2	TX2632-16					
			1-3/4	TX1822-14				2-1/2	TX2632-18					
			2	TX1822-16										
			2-1/4	TX1822-18										
			2-1/2	TX1822-20										
1-1/4X1-1/2	1.2565	1.5035	1	TX2024-08	1-3/4X2	1.7585	2.005	1-1/2	TX2832-12					
NOMINAL	1.255	1.502	1-1/4	TX2024-10	NOMINAL	1.7565	2.003	2	TX2832-16					
			1-1/2	TX2024-12				2-1/4	TX2832-18					
								2-1/2	TX2832-20					



Special Cast Bronze Bearings + Machined Components



Custom Shafting + Bearing and P/M Assemblies

oilite®

BEARINGS

ADDITIONAL MANUFACTURING CAPABILITIES

- Extensive CNC machining facilities produce bearings in many common alloys
- In-house coating and impregnation facilities
- Special machined cast bronze bearings
- Close tolerance P/M bearings
- Graphiting
- Prototyping and sample services are available in P/M and most materials
- Production of shafts in many common steel alloys
- Secondary P/M machining and assembly
- SPC on all required runs
- Grooving

COMMON BRONZES

DESIGNATION NAME	CDA	MECHANICAL PROPERTIES				
		TENSILE STRENGTH (TYPICAL)	YIELD STRENGTH (TYPICAL)	ELONGATION	COMPRESSIVE YIELD STRENGTH (0.1 IN. SET/IN.)	HARDNESS BHN
HIGH-LEADED TIN BRONZE	C932000	35 KSI	18 KSI	15%, IN 2 IN.	46 KSI	65 (TYP)
HIGH PB-LOW ZN BRONZE	C936000	35 KSI	21 KSI	10%, IN 2 IN.	46 KSI	65 (TYP)
LEAD-FREE BRONZE	C89635	35 KSI	18 KSI	15%	42 KSI	65 (TYP)
ALUMINUM BRONZE	C95400	85 KSI	35 KSI	12%, IN 2 IN.	100 KSI	150 (MIN.)
ALUMINUM BRONZE	C95400 HT	105 KSI	54 KSI	6%, IN 2 IN.	100 KSI	190 (MIN.)
MANGANESE BRONZE	C86300	119 KSI	67 KSI	12%, IN 2 IN.	97 KSI	223 (MIN.)

WARRANTY. Seller warrants that if any product of its manufacture upon examination if found by a Seller's representative to be defective in either workmanship or material under normal use and service Seller, at its option, will repair or replace same free of charge including lowest transportation charges but not cost of installation or removal or will refund the purchase price thereof, provided that Seller receives written claim specifying the defect within ninety (90) day from date of distributor sale or one (1) year from date of factory shipment, whichever occurs first. In no event shall Seller be liable for any claims, whether arising from breach of contract or warranty or claims of negligence or negligent manufacture, in excess of the purchase price. ALL OTHER WARRANTIES EXPRESSED AND IMPLIED INCLUDING ANY WARRANTIES OF MERCHANTABILITY AND FITNESS FOR PARTICULAR USE ARE HEREBY DISCLAIMED. The foregoing expresses all of Seller's obligations and liabilities with respect to the quality of items furnished by it and it shall under no circumstances be liable for consequential, collateral or special losses or damages.

CONVERSION		
Fraction	Decimal	MM
1/64	0.0156	0.396
1/32	0.0312	0.793
3/64	0.0468	1.190
1/16	0.0625	1.587
5/64	0.0781	1.984
3/32	0.0937	2.381
7/64	0.1093	2.778
1/8	0.1250	3.175
9/64	0.1406	3.571
5/32	0.1562	3.968
11/64	0.1718	4.365
3/16	0.1875	4.762
13/64	0.2031	5.159
7/32	0.2187	5.556
15/64	0.2343	5.953
1/4	0.2500	6.350
17/64	0.2656	6.746
9/32	0.2812	7.143
19/64	0.2968	7.540
5/16	0.3125	7.937
21/64	0.3281	8.334
11/32	0.3437	8.731
23/64	0.3593	9.128
3/8	0.3750	9.525
25/64	0.3906	9.921
13/32	0.4062	10.318
27/64	0.4218	10.715
7/16	0.4375	11.112
29/64	0.4531	11.509
15/32	0.4687	11.906
31/64	0.4843	12.303
1/2	0.5000	12.700
33/64	0.5156	13.096
17/32	0.5312	13.493
35/64	0.5468	13.890
9/16	0.5625	14.287
37/64	0.5781	14.684
19/32	0.5937	15.081
39/64	0.6093	15.478
5/8	0.6250	15.875
41/64	0.6406	16.271
21/32	0.6562	16.668
43/64	0.6718	17.065
11/16	0.6875	17.462
45/64	0.7031	17.859
23/32	0.7187	18.256
47/64	0.7343	18.653
3/4	0.7500	19.050
49/64	0.7656	19.446
25/32	0.7812	19.843
51/64	0.7968	20.240
13/16	0.8125	20.637
53/64	0.8281	21.034
27/32	0.8437	21.431
55/64	0.8593	21.828
7/8	0.8750	22.225
57/64	0.8906	22.621
29/32	0.9062	23.018
59/64	0.9218	23.415
15/16	0.9375	23.812
61/64	0.9531	24.209
31/32	0.9687	24.606
63/64	0.9843	25.003
1	1.0000	25.400

www.oilite.com

www.oilite.com

Oilite[®], Super Oilite[®], Non-Tox[®] & Excelite[®] Bearings



oilite[®]
BEARINGS

Beemer Precision, Inc.
230 New York Drive,
P.O. Box 3080
Fort Washington, PA 19034
800.836.2340
Tel. 215.646.8440 Fax 215.283.3397
www.oilite.com