

Receiver

From

**Item n° :**

60122626

**Model :**

DIVERTRON 1200 M

**Pump data**

Pressure rating :

Min. fluid temperature : 0 °C

Max. fluid temperature : 35 °C

Max. Ambient temperature :

**Requested data**

Flow : 0 m³/h

Head : 0 m

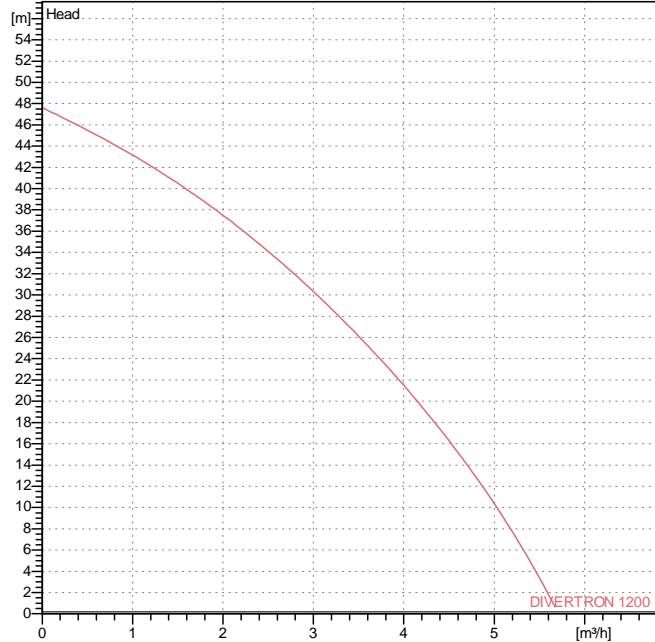
Fluid : Water, pure

Fluid Temperature : 20 °C

Density : 0,9983 kg/dm³

Kinematic viscosity : 1,005 mm²/s

Vapor pressure : 2,337 kPa

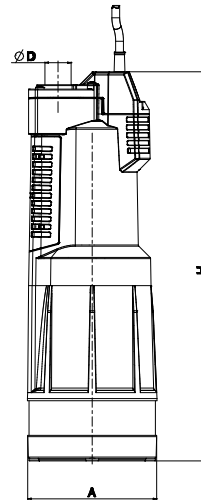
**Curve tolerance according to ISO 9906**

**Hydraulic data (duty point)**

Flow :

Head :

**Materials**

Pump body	Technopolymer
Impeller	Technopolymer
Diffuser	Technopolymer
OR ring	NBR
Suction filter	Stainless Steel AISI 304
Motor shaft	AISI 416
Motor casing	Aluminium


**Motor data**
**Weight :** 11 kg

Motor brand :	DAB	
Nominal power P2 :	0,75 kW	
Rated voltage :	1~ 220-240 V	50 Hz
Nominal current :	4,8 A	
Number of poles :	2	
Rated speed :	2800 1/min	
Degree of protection :	IP X8	

**Dimensions in mm**

Dimension	Value				
A	150				
D	30				
H	480				

**Pump connection**

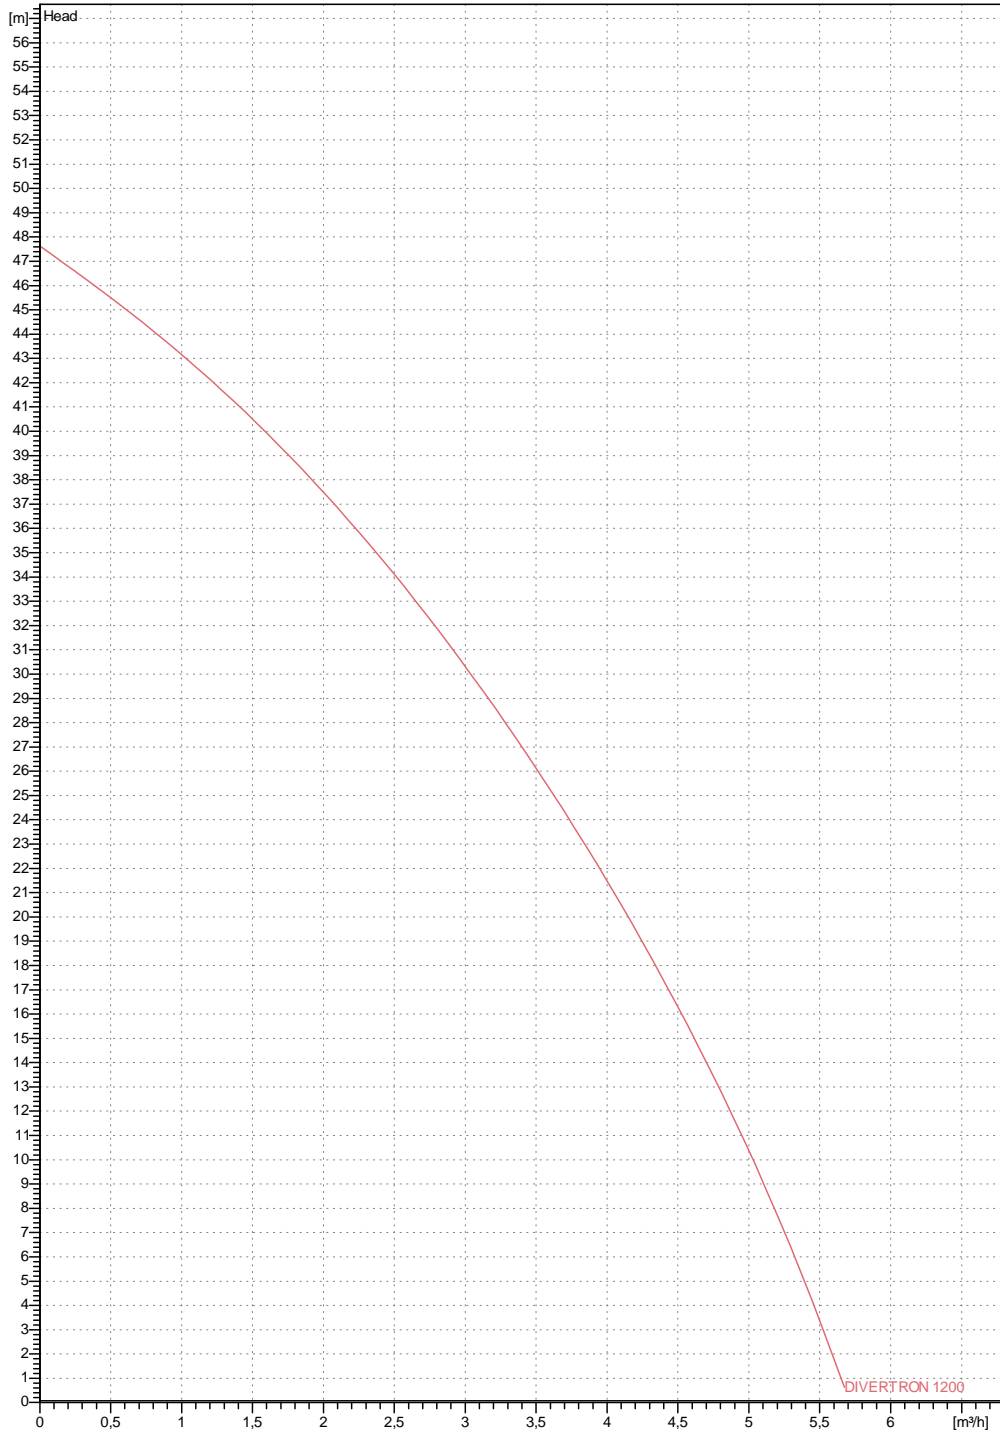
 Suction side : /  
 Discharge side : /

Receiver

From

## DIVERTRON 1200 M

Curve tolerance according to ISO 9906



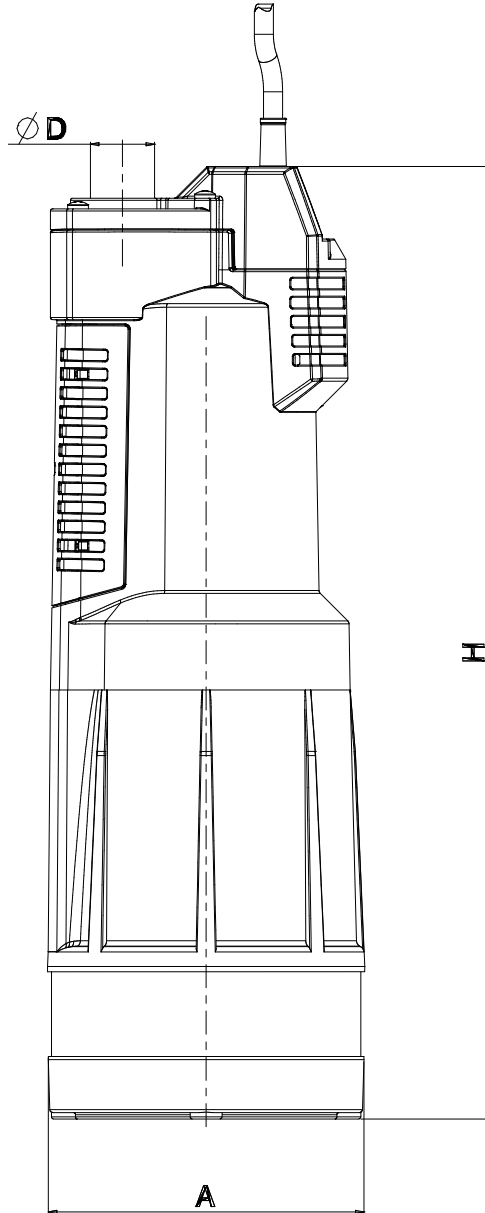
Hydraulic data (duty point)

Suction side :	Discharge side :	Flow : 0 m³/h	Head : 0 m	Rated speed : 2800 1/min
Project	Project ID	Created by	Created on <b>2018-06-04</b>	

Receiver

From

## DIVERTRON 1200 M


**Dimensions in mm**

1	A	150				
2	D	30				
3	H	480				

**Pump connection**

Suction

Discharge

Project

Project ID

Created by

Created on

**2018-06-04**