


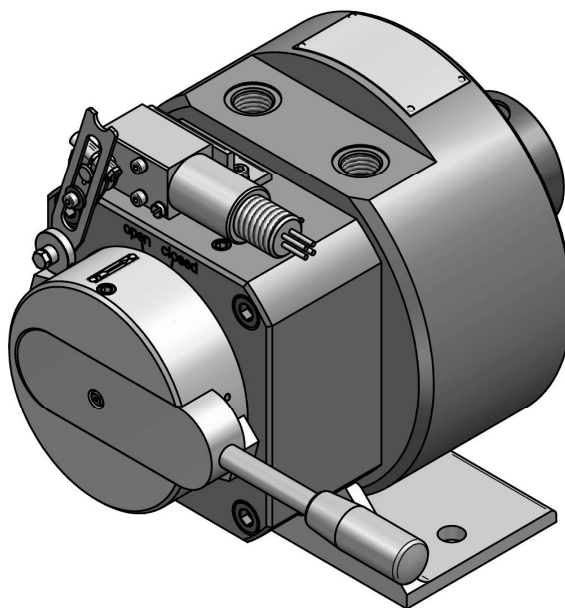

Technical Data

Ordering Drawing	91-434028P001 and 134A3121P001
Number of Inlets	10
Total Flow Rate	0.26 GPM (1 l/min) per inlet
Operating Pressure	1230 psig (85 bar)
design Pressure casing	1740 psig (120 bar)
Fluid Temperature	Max. 302°F (150°C)
Fuels	Distillate; Heavy Fuel, Crude Oil, Naphtha, Kerosine

Materials

Casing and Housing	Surface Treated Nodular Cast Iron
Internal Parts	Tungsten Carbide Coated Hardened Stainless Steel
Bearings	Hardened Stainless Steel
Sealing	Viton

Weight and Shipping Dimensions


Gross Weight	52 kg
Net Weight	46 kg
Dimensions	60 cm x 50 cm x 40 cm

2014/34/EU ATEX

This Flow Divider is in accordance with Appendix II of Directive 2014/34/EU

CE  II 2 G c X

EN ISO 80079-36:2016:12
EN ISO 80079-37:2016:12
EN 1127-1:2019

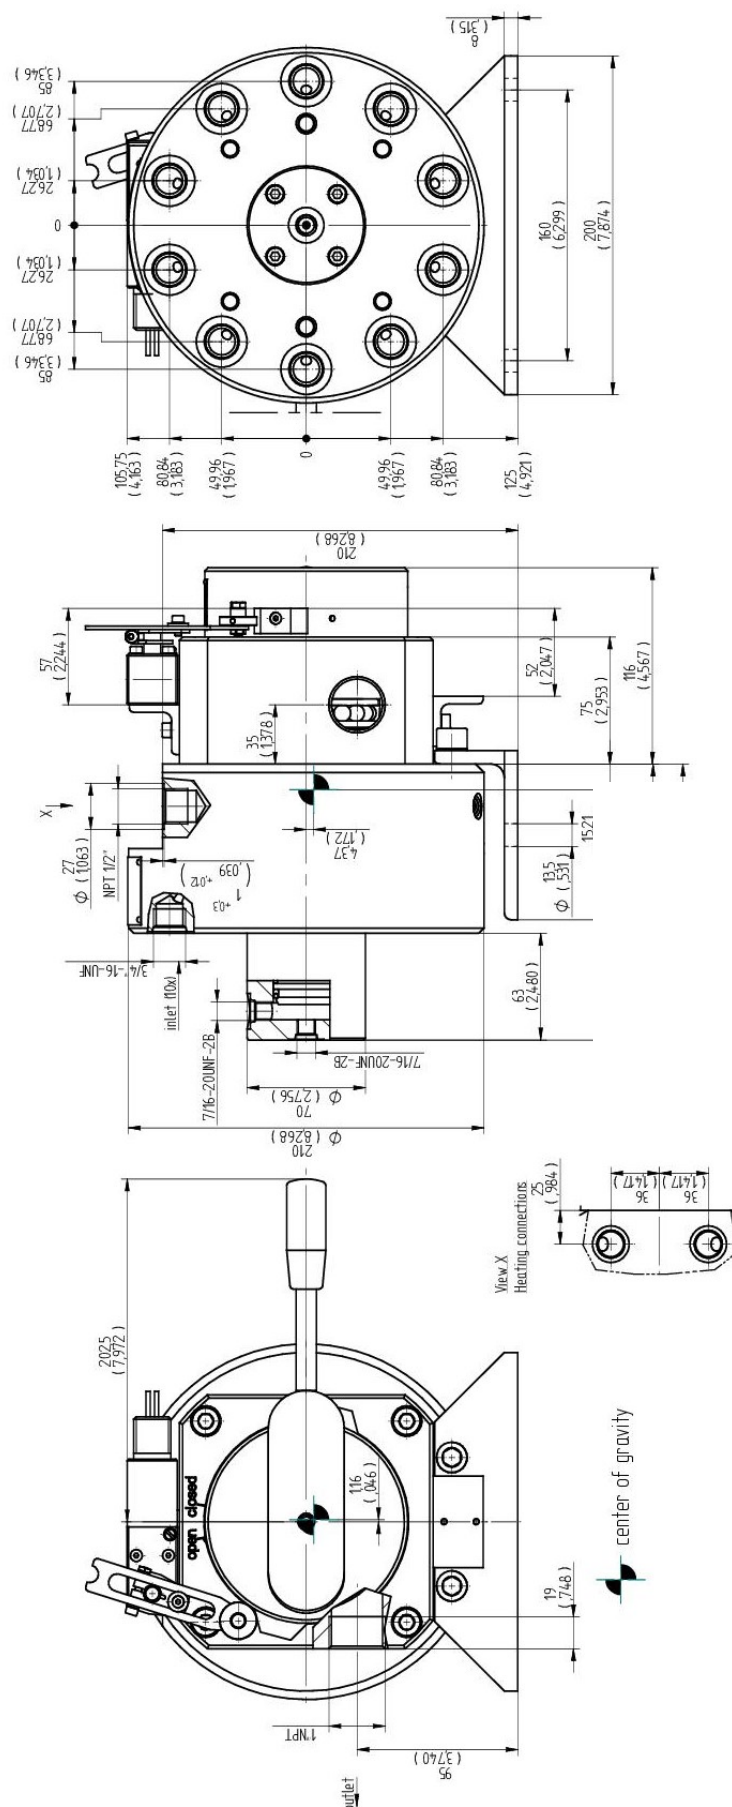

All dimensions in mm