


PRODUCT DESCRIPTION:

AP_T38

PRODUCT CODE:



AP3T38Z11

DYNAMIC 3D VIEW:



STATIC 3D VIEW:

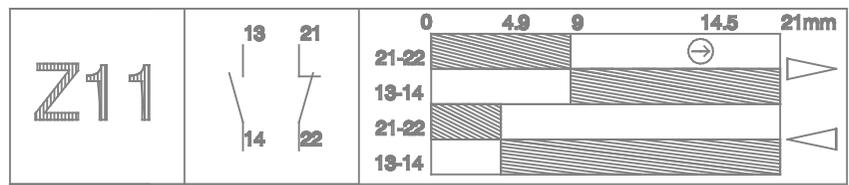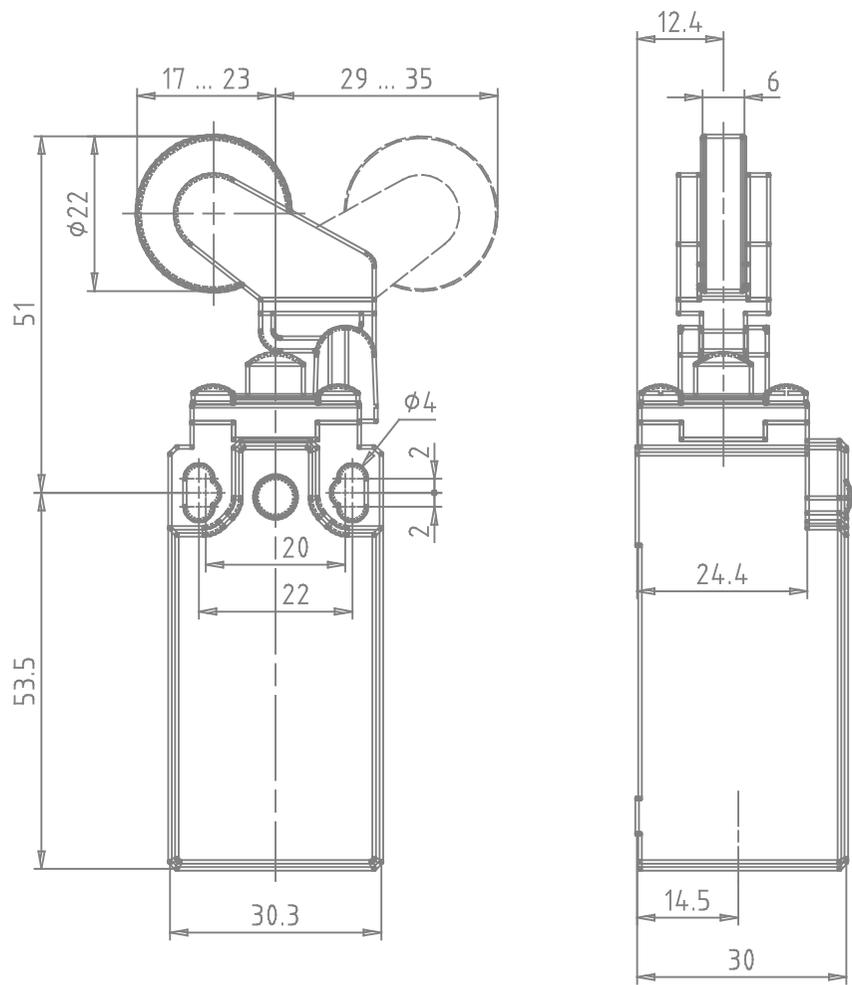

TECHNICAL VIEW:


DETAILS:

Part Number	AP3T38Z11
Casing Material	Reinforced thermoplastic
Width [mm]	30
Electrical connections	One threaded cable inlet for PG11 cable glands
IP Degree of Protection	IP65
Actuating Head	Adjustable lever with nylon roller on steel plunger
Head Material	Thermoplastic
Microswitch	Snap action contacts (1NO + 1NC)
Approvals	IMQ - cULus - CCC - CSA - EAC
Reference Directives	LVD - 2014/35/EU
Reference Standards	IEC 60947-5-1 / EN 60947-5-1
Operating Temperatures [°C]	-25°C ... +70°C
Stock Temperatures [°C]	-30°C ... +80°C
Protection Against Electrical Shocks [Class (according to IEC 60536)]	Class II - Double insulation
Rated Insulating Voltage Ui [V]	500
Pollution Degree	3
Contact rating acc. to UL50	A600 - Q600
Rated Impulsive Voltage Uimp [kV]	6
Free Air Conventional Thermal Current Ith [A (θ	10
Protection Against Short Circuit [A (Ue	10
Rated Operational Current Ie - AC-15 (50-60 Hz) [According to IEC 60947-5-1]	24V - 10A / 120V - 6A / 400V - 4A
Rated Operational Current DC-13 [According to IEC 60947-5-1]	24V - 6A / 125V - 0.55A / 250V - 0.4A
Switching Frequency [Cycles/Hour]	3600
Resistance Between Contacts [mΩ]	25
Connecting Terminals	M3.5 screws with cable clamp (+,-) pozidriv 2
Connecting Cables Dimesions [mm ²]	0.75 ... 2.5
Protective Conductor Terminal	/
Marking Terminals	According to IEC 60947-5-1
Mechanical Durability [Millions of Operations]	15
B10d [Millions of Operations]	30

PRODUCT DRAWING RELEASE:

Datasheet creation date: 05/12/2018 14:03

Last Modification (geometry): 12/12/2017 06:54

